



CAMPUS TO COMMONS TRAIL CONNECTIVITY STUDY

PRELIMINARY DRAFT

FEBRUARY 2024

LEXINGTON, KY

“People of all ages and abilities will have access to comfortable and convenient walking and biking routes, resulting in true mobility choice, improved economic opportunity, and healthier lifestyles.”

- FROM THE LEXINGTON AREA BICYCLE AND PEDESTRIAN
MASTER PLAN VISION STATEMENT





CAMPUS TO COMMONS TRAIL CONNECTIVITY STUDY

STUDY BACKGROUND

The Campus to Commons Trail corridor, connecting the Meadowthorpe neighborhood with the University of Kentucky campus and crossing the Town Branch Trail, is a critical crosstown connection for Lexington's bicycle and pedestrian network. Most of the corridor lacks adequate sidewalks, protected bicycle facilities, and safe intersections. This impedes the ability of the corridor to equitably serve the people who travel to the jobs, education, and the goods and services located there. For these reasons, the Lexington Area Metropolitan Planning Organization (LAMPO) initiated the Transportation Corridor Study in the summer of 2023.



Goals | There are four goals for the Campus to Commons Trail Connectivity Study:



Trail Alignment: Determine the preferred trail facilities and alignments to provide a safe and comfortable experience for people using the trail corridor.



Safety: Develop preliminary design solutions to improve safety of all users at intersections.



Implementation: Establish a project development plan with a phasing strategy based on cost estimates.



Outreach: Incorporate inclusive public outreach into the study findings and implementation recommendations.

Action Steps | Here's how we met the goals of the study:



This study builds on many previous studies and reference documents. Links to these documents can be found in the appendices.

Master plans from the University of Kentucky and the Lexington Area MPO identify the Campus to Commons corridor as a critical bike connection in the City's network.

Intersection and corridor studies, including the Imagine Nicholasville Road plan, present ideas for portions of the corridor, while the Red Mile Development Plan proposes a greenway along Red Mile Road.




This project is a partnership with the City of Lexington and the University of Kentucky. A consultant team led by Clark Dietz was hired to perform the study.

CORRIDOR OVERVIEW

The Campus to Commons corridor is approximately three miles long and is split into three unique areas. The **Southern Area** includes Virginia Avenue from Limestone to Broadway. The **Central Area** encompasses the Red Mile Road segment of the trail corridor and runs from Broadway to Versailles Road. The **Northern Area** is the longest of the three segments and encompasses Forbes Road from Versailles Road to Leestown Road; it also intersects the Town Branch Trail which serves as an important connection to downtown Lexington.



It's clear there are gaps in bike and pedestrian connectivity along the corridor.

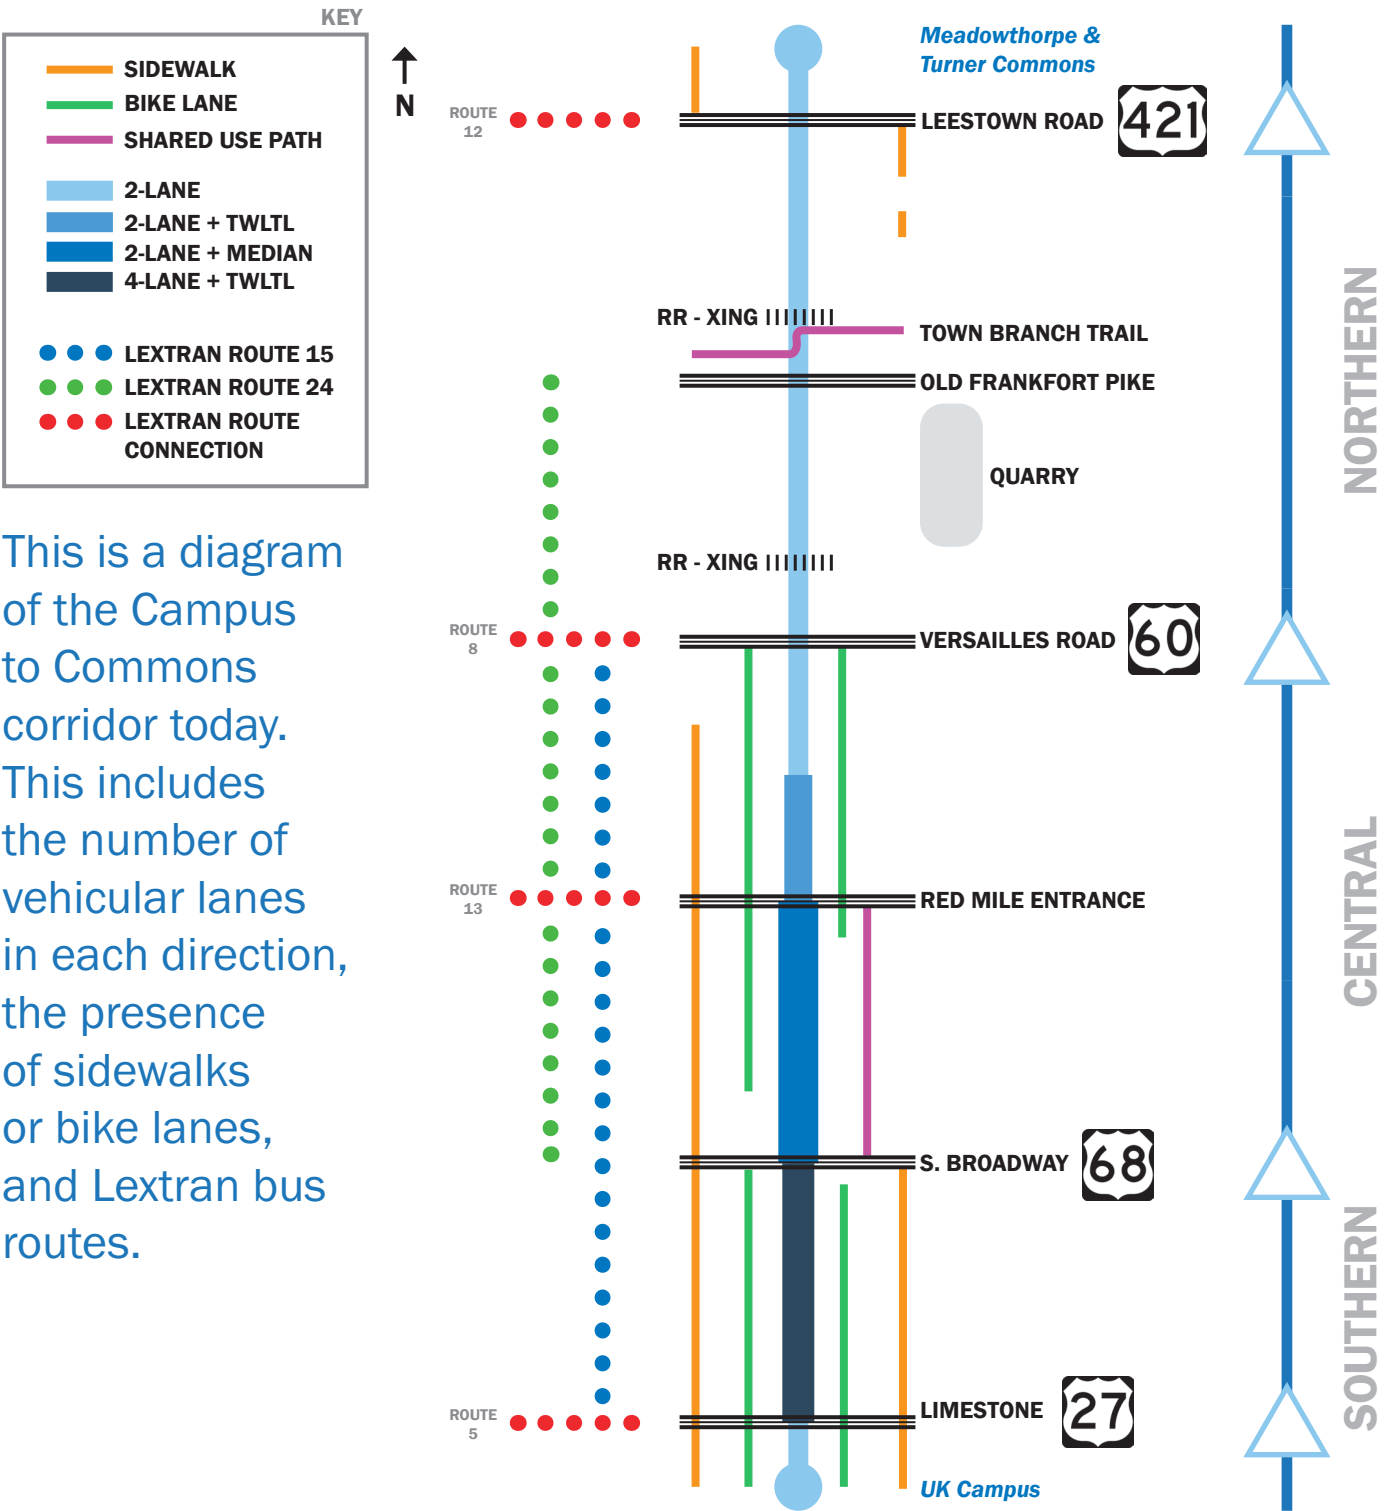


This is a diagram of the Campus to Commons corridor today. This includes the number of vehicular lanes in each direction, the presence of sidewalks or bike lanes, and Lextran bus routes.

PUBLIC OUTREACH PLAN

Listening to and learning from the public

Public outreach focused on gathering community feedback from both focused stakeholder groups and the broader public through various methods.

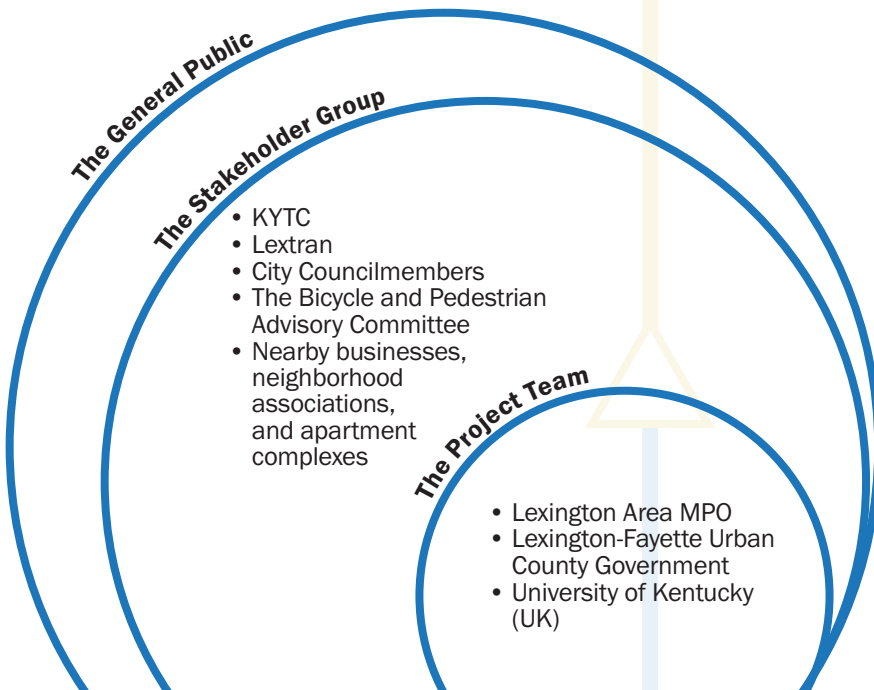

KEY ELEMENTS

- ▶ Two Stakeholder Meetings
- ▶ One Public Open House
- ▶ Two Surveys

Getting the word out:

- Project website
- Social media posts
- Digital ads
- Posters and door hangers
- Local and campus newspapers
- Press releases to local media

How do you use the corridor today?

SURVEY NO. 1

500 Responses



20% walk, bike, or ride a scooter



Majority feel “somewhat” comfortable and safe on the corridor

What do you think of the proposed improvements?


SURVEY NO. 2

To be completed after the second survey.

- **Improve safety for biking**
 - **Fix and/or add sidewalks**
 - **Make intersections safer**

WHAT SHOULD BE IMPROVED?

SAFETY AND TRAFFIC

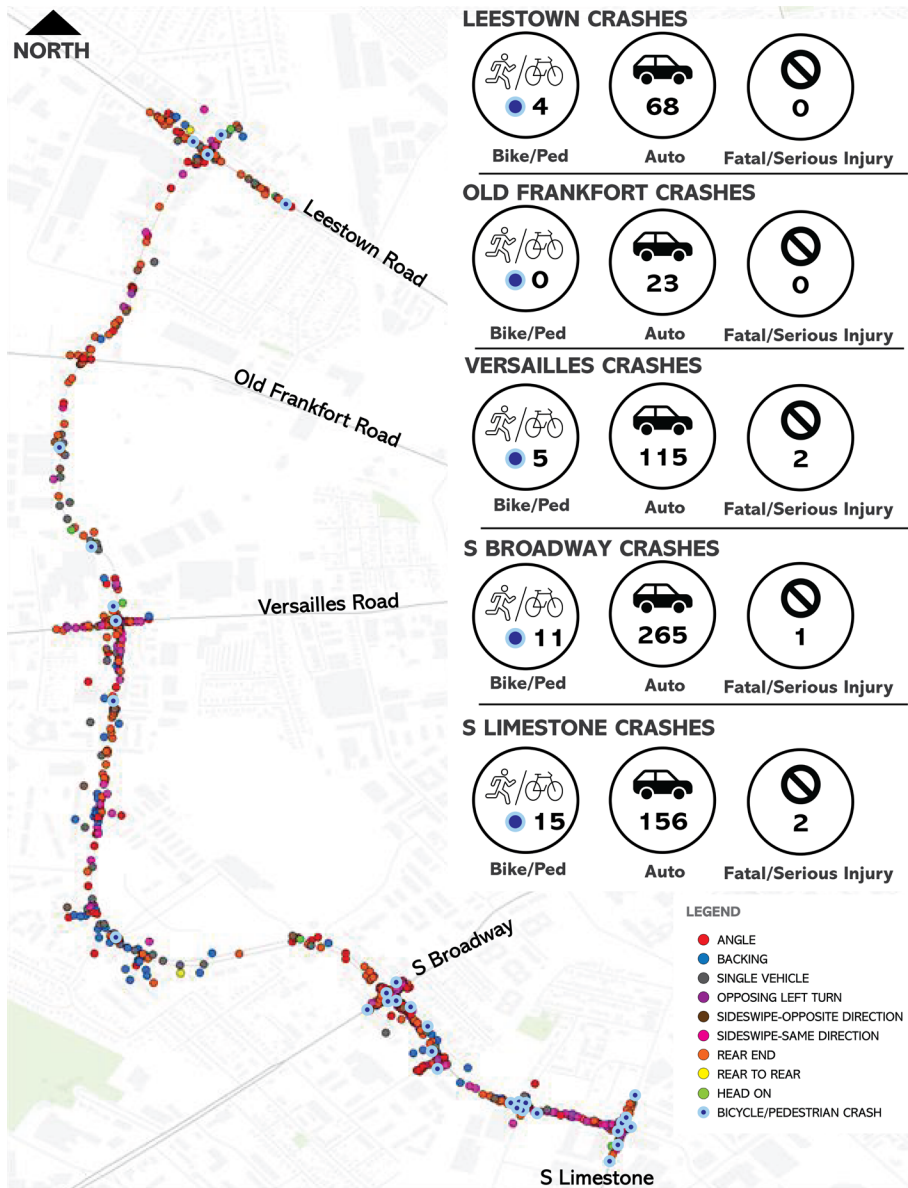

0

Vision Zero is a strategy to eliminate all traffic fatalities and severe injuries, while increasing safe, healthy, equitable mobility for all.

Safety Overview

Vision Zero and Complete Streets strategies were implemented for this study. These design strategies aim to put bicyclist and pedestrian safety at the forefront of corridor design by slowing vehicular speeds, increasing visibility, reducing collisions and conflict points, and providing safe and comfortable movement of people along our roadways.

Historical Safety

Five years (2018-2022) of crash data was analyzed from the Kentucky State Police. A concentration of crashes appears at the major intersections along the corridor with three serious injury crashes and 36 bicycle/pedestrian crashes within the timeframe. The figure to the left highlights crash locations and types by manner of collision and specifically calls out bicycle/pedestrian crashes.

Traffic Overview

Both vehicular and multimodal traffic have similar trends along the corridor. Activity is directional, with most people traveling southbound in the morning and northbound in the afternoon. Activity is highest along Virginia Avenue from Limestone to Broadway with approximately 5,000 bicyclists/pedestrians and 17,000 vehicles daily. Activity decreases near Versailles Road and Old Frankfort Pike and picks back up at the Leestown/Main Street intersection.

A traffic model was created to compare existing conditions and proposed conditions. Measurements include travel time, delay, and Level of Service (LOS). Data and results from the traffic model can be found in the appendices.

~200 crashes per year (3 serious injury)

~7 bicycle/pedestrian crashes/year

LexTran Route 24 along the corridor is one of the busiest routes in Lexington.

Over **5,000** bicyclists/pedestrians use the corridor daily


8,000-17,000 daily vehicles

COMPLETE STREETS TOOLBOX INTERSECTIONS




Protected Intersection

Protected intersections have physical barriers that enhance safety and simplify bicycle traffic flows.

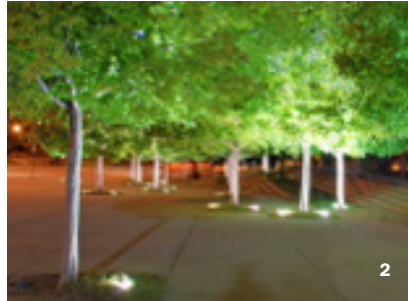

Pedestrian Scale Lighting

Pedestrian scale lighting provides safety and a sense of place for pedestrians in walkable environments.

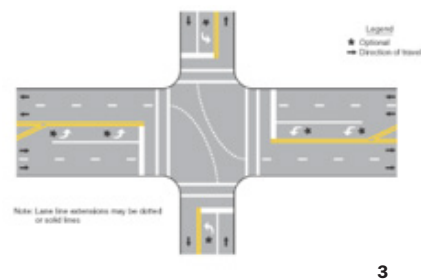

Turn Lane Extension Lines

Turn lane extension lines act as a guide for turning vehicles in larger intersections, adding ease of driving and more awareness for multimodal users.



Cross Lane Rumble Strip

Cross lane rumble strips enhance driver awareness of a crossing or intersection where visibility may be limited.

Transit Stop Improvements

Transit stop improvements, such as sidewalks, shelters, and lighting, provide community placemaking, safety, and accessibility for all users.

High Friction Surface Treatment (HFST)

HFST enhances pavement friction and boosts safety, specifically on downhill grades, curves, and signal approaches.

Access Management

Access management reduces the number of conflict points by restricting turning movements or limiting excess driveways, enhancing safety and mobility.

Enhanced Detection

Enhanced detection provides a reliable way of recognizing pedestrians, cyclists, and vehicles, reducing waiting times and impatience.

Reflective Backplates

Reflective backplates offer better visibility for signals to enhance traffic signal safety, reducing red light running events.


- 1, 2 - Louisville Complete Streets Guide
- 3 - Manual on Uniform Traffic Control Devices
- 4 - FHWA
- 5, 6 - KYTC Complete Streets, Roads, and Highways Manual
- 7 - Clark Dietz

CORRIDORS



Shared Use Path

Shared use paths provide a separated facility that is safe and convenient for pedestrians and cyclists.

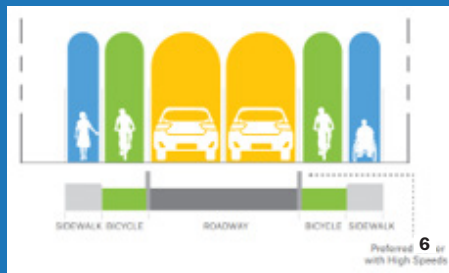

Rightsizing

Rightsizing provides safe space for all users, rethinking how roadways are normally used and limiting the number of vehicular



Protected Bike Lanes

Protected bicycle lanes provide a physical barrier that separates cyclists from vehicles and boosts multimodal safety.

SOUTHERN AREA

⌘ LIMESTONE INTERSECTION

Existing Conditions


Located in the heart of the University of Kentucky campus, the S Limestone and Virginia/Huguelet Drive intersection experiences high volumes of vehicles, pedestrians, and bicyclists.

- Highest Pedestrian/Bicyclist Intersection in Study Area
- Stone walls on campus and proximity of buildings limits room for geometric improvements
- Included in Imagine Nicholasville Road study and will include bus rapid transit
- **Daily Bicycle/Pedestrian Count: 4,851**



Proposed Improvements

- 1 Shortened Crosswalk Distance
- 2 Improved Effective Curb Radius
- 3 Shared Thru/Right on Virginia Approach
- 4 Protected Bicycle Intersection + Bicycle Detection
 - Pedestrian Scale Lighting
 - No Right Turn on Red
 - Turning Lane Extension Lines
 - Reflective Backplates
 - Enhanced Detection

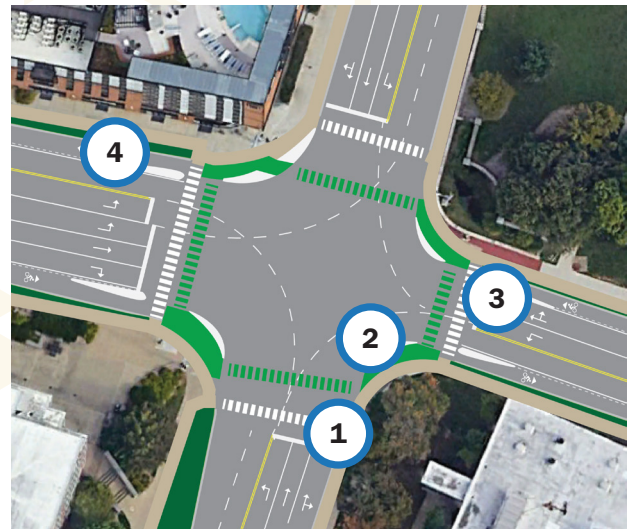

Long-Term Innovative Intersection Concept: Bowtie Roundabouts

Bowtie Roundabouts were proposed for the intersection through the Imagine Nicholasville Road. The Bowtie Roundabouts would be located at the hospital parking garage entrance along Huguelet Drive and the Press Avenue signal along Virginia Avenue. These roundabouts could safely accommodate bicyclists and pedestrians while slowing vehicular traffic to safer speeds.



NORTHERN

CENTRAL

SOUTHERN



SOUTHERN AREA

VIRGINIA AVENUE & HUGUELET DRIVE SEGMENT

Existing Conditions

Virginia Avenue:

- High pedestrian and bicyclist activity
- Dense land use
- US Route 27 with KYTC jurisdiction
- Overbuilt five-lane roadway
- Unprotected bike lanes
- Moderate right-of-way



SAFETY SCORECARD

Bicycle/Pedestrian Crashes:	9 (Poor)
Fatal/Serious Injury Crashes:	0 (Great)
Segment Crashes:	210 (Poor)
Excess Expected Crashes:	52.8 (Poor)
Level of Safety Service:	3 of 4 (Poor)

See appendices for more information.

Lextran Routes

15

Huguelet Drive:

- University of Kentucky campus
- Narrow right-of-way
- Unprotected bike lanes
- University-owned street

Land Uses



Institutional // Commercial // Multifamily

Pedestrian Activity



Bike Activity



Proposed Improvements

- Reconfigure vehicular lanes to right-size the street
- Add permanent vertical protection for bike lanes to encourage more cyclists
- Reduce number of driveways to increase pedestrian safety
- Remove unused turn lanes to slow vehicles
- Rebuild curb and gutter on one side of road to narrow street
- Widen sidewalks to eight feet for more comfortable pedestrian environment





NORTHERN

CENTRAL

SOUTHERN

SOUTHERN AREA
VIRGINIA AVENUE

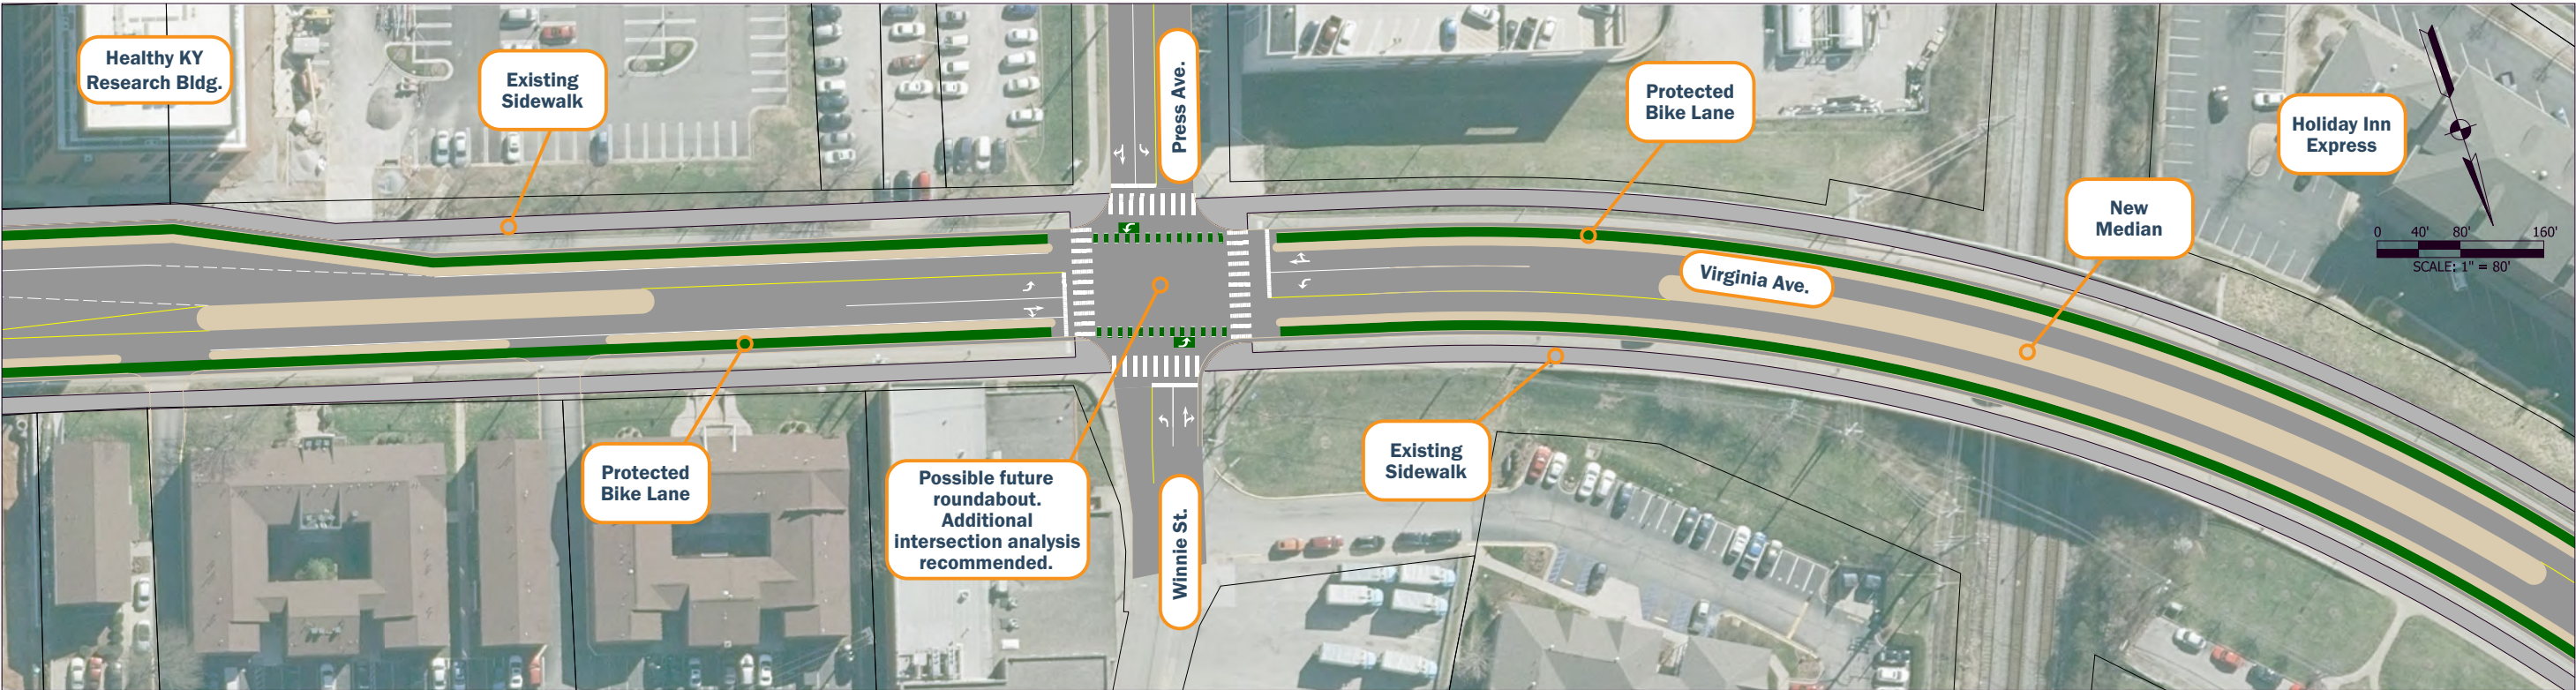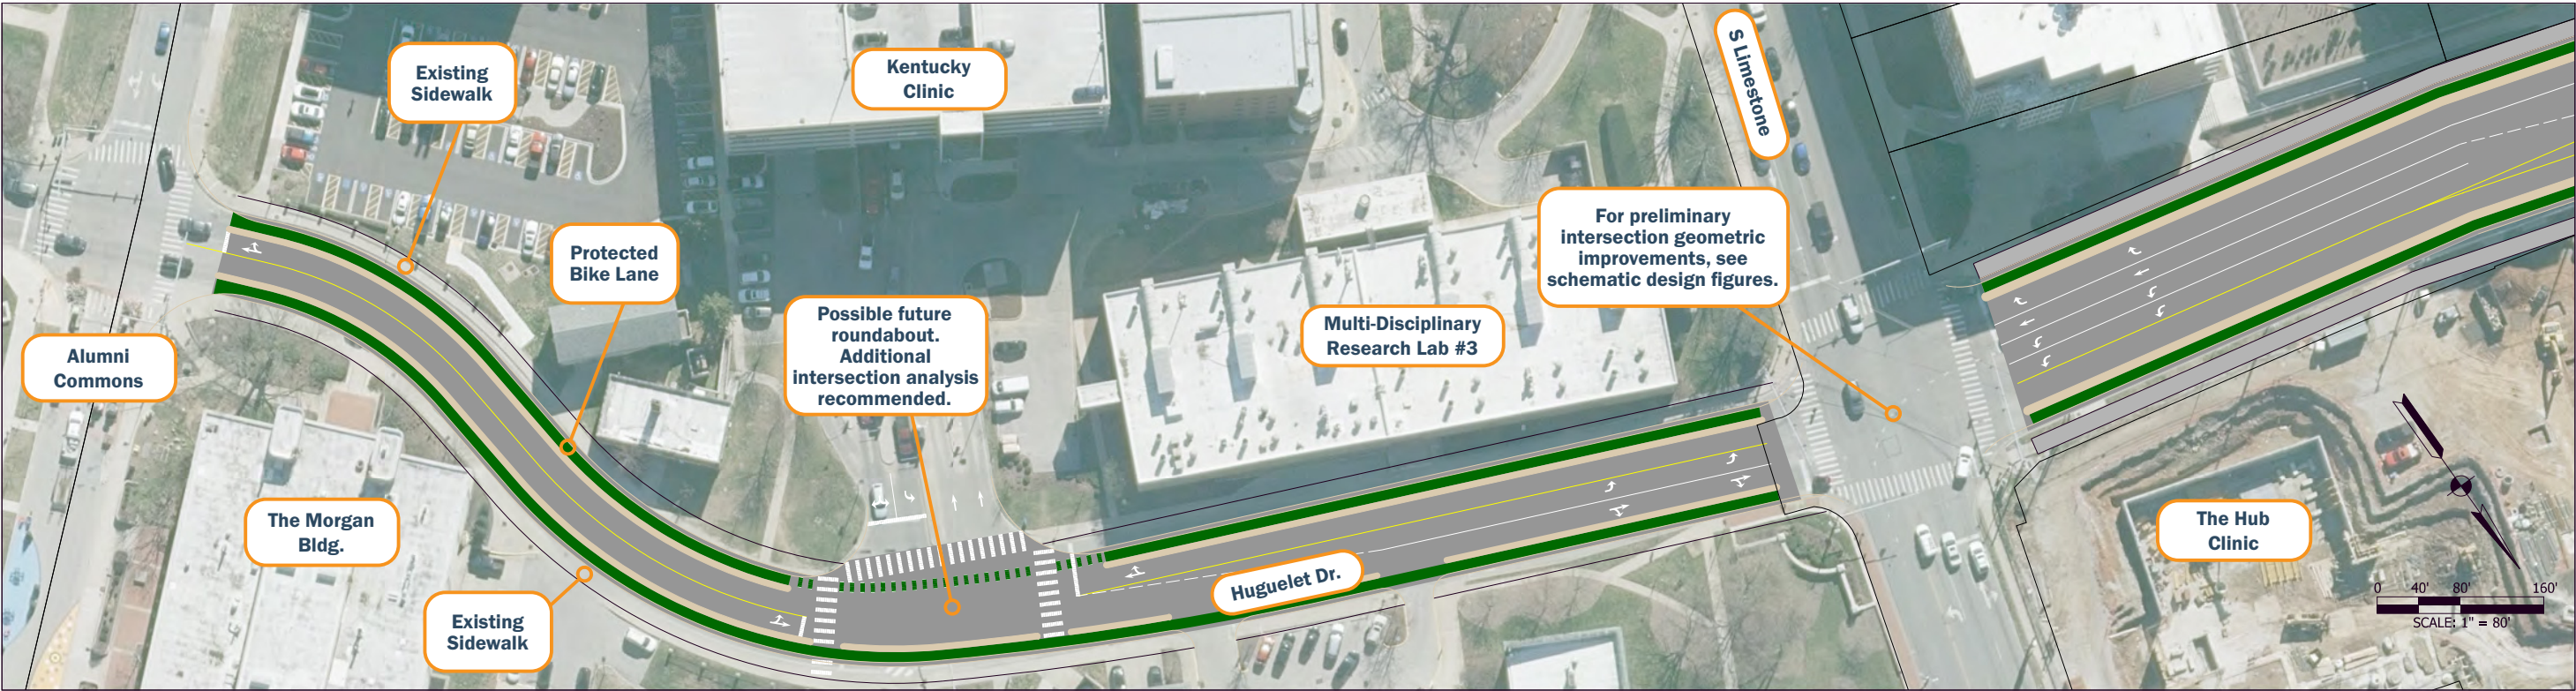


NORTHERN

CENTRAL

SOUTHERN

SOUTHERN AREA
VIRGINIA AVENUE

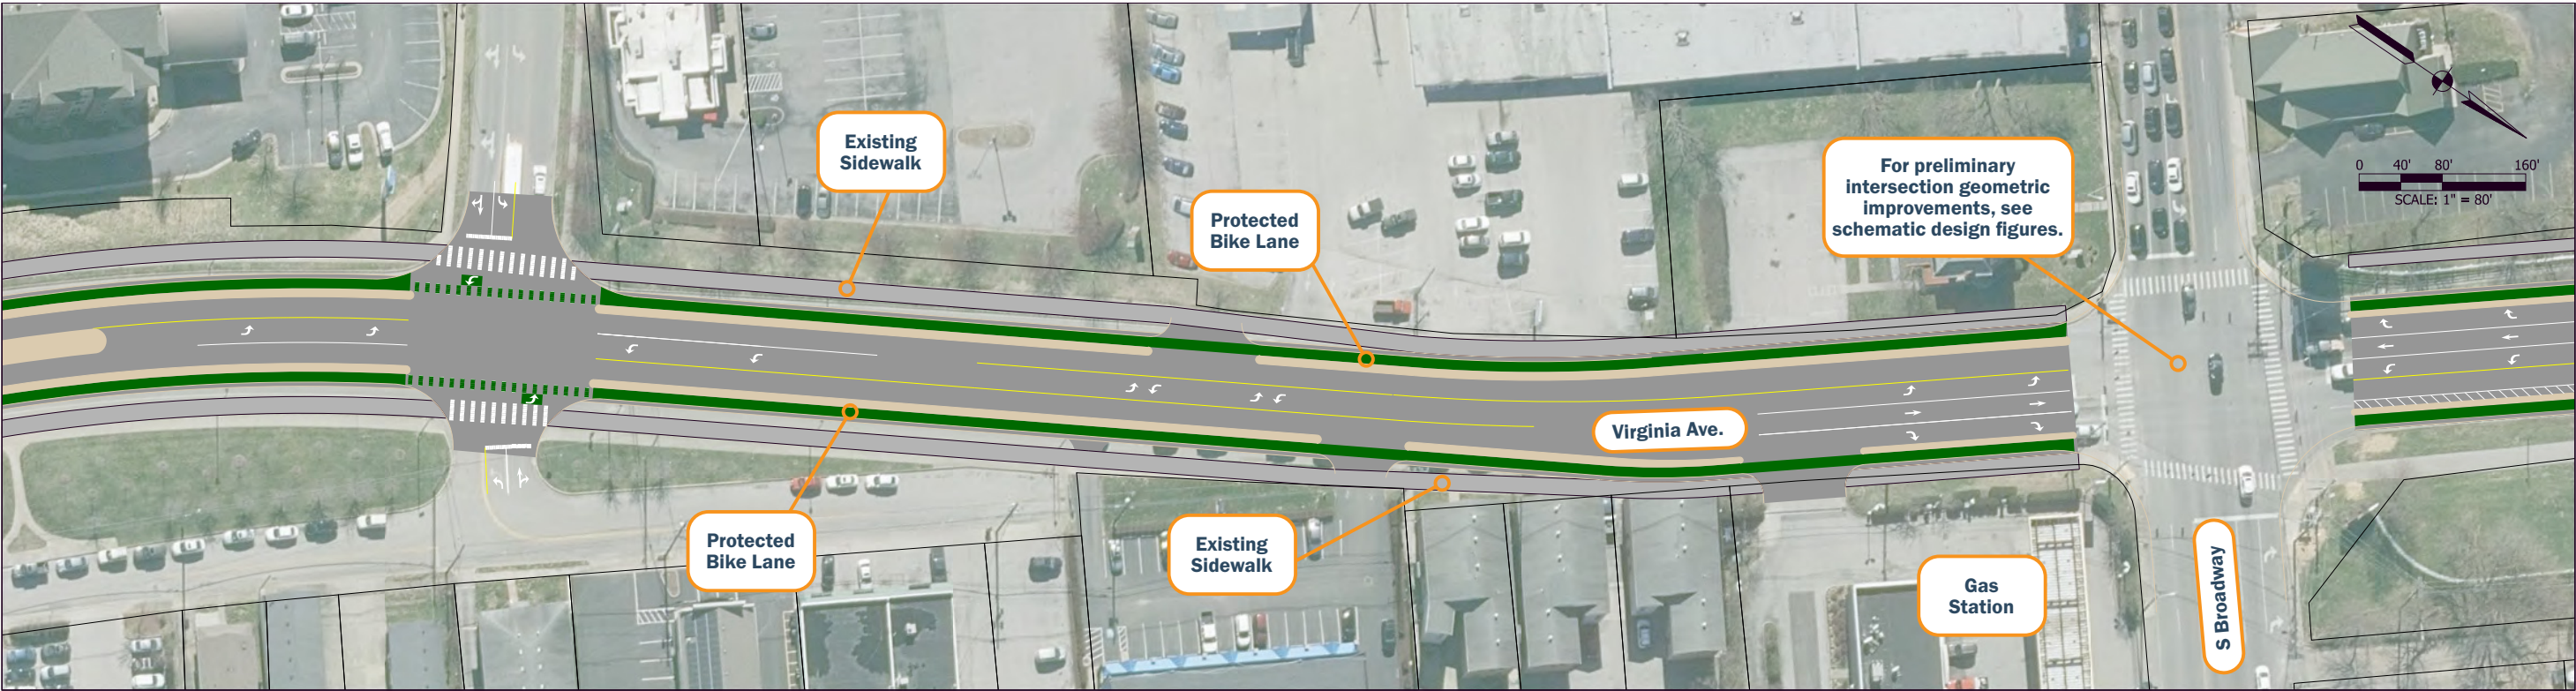

NORTHERN

CENTRAL

SOUTHERN

SOUTHERN AREA

⦿ S BROADWAY INTERSECTION

Existing Conditions


A critical connection between student housing and UK's campus, this intersection sees significant bicycle and pedestrian traffic in addition to high vehicular volumes. Traffic congestion causes slower vehicle speeds in the peak hours, but tight right-of-way keeps pedestrians dangerously exposed to the roadway.

- High volumes of pedestrians, bicyclists, and vehicles
- Large utility facilities create constraints
- Closely spaced driveways nearby
- **Daily Bicycle/Pedestrian Count: 167**



Proposed Improvements

- 1 Improved Effective Curb Radius
- 2 Shared Thru/Right on Virginia Approach
- 3 Protected Bicycle Intersection + Bicycle Detection
- 4 Pedestrian Scale Lighting
 - Shortened Crosswalk Distance
 - No Right Turn on Red
 - Turning Lane Extension Lines
 - Reflective Backplates
 - Enhanced Detection

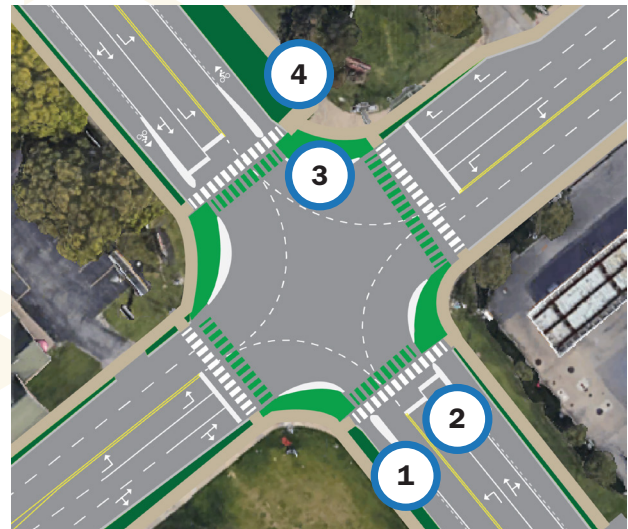

Long-Term Innovative Intersection Concept: *Median U-Turns*

A Median U-Turn Intersection operates similarly to a Restricted Crossing U-Turn (RCUT) Intersection but with signals at the U-Turns. This intersection eliminates left turns from one major movement and allows vehicles to make a right turn plus a U-Turn to reduce conflict points in the intersection. This intersection could improve bicycle and pedestrian safety.



Source: FHWA

NORTHERN

CENTRAL

SOUTHERN



CENTRAL AREA RED MILE ROAD SEGMENT

Existing Conditions

- Four-lane boulevard with median transitions to two lanes with partial curbs
- Large apartment complexes
- Adjacent to Red Mile Racetrack
- Golfview Estates neighborhood
- Two Lextran bus routes
- Wide right-of-way



SAFETY SCORECARD

Bicycle/Pedestrian Crashes: **2 (Not Great)**

Fatal/Serious Injury Crashes: **0 (Great)**

Segment Crashes: **215 (Poor)**

Excess Expected Crashes: **10.6 (Poor)**

Level of Safety Service: **4 of 4 (Poor)**

See appendices for more information.

Lextran Routes

15

24

Land Uses



Commercial // Multifamily

Pedestrian Activity



Bike Activity



Proposed Improvements

- Reconfigure vehicular lanes to right-size the street
- Add permanent vertical protection for bike lanes to encourage more cyclists
- Extend Red Mile sidewalk to Versailles Road to complete gap
- Widen sidewalks to six feet for more comfortable pedestrian environment
- Install street trees to increase drive awareness and to create a more comfortable pedestrian environment
- Install curb and gutter north of Red Mile Racetrack entrance to encourage slower speeds
- Add marked crosswalks across Red Mile Road for more pedestrian connection options
- Reduce speed limit to 30 MPH




NORTHERN


CENTRAL

SOUTHERN

CENTRAL AREA
RED MILE ROAD SEGMENT

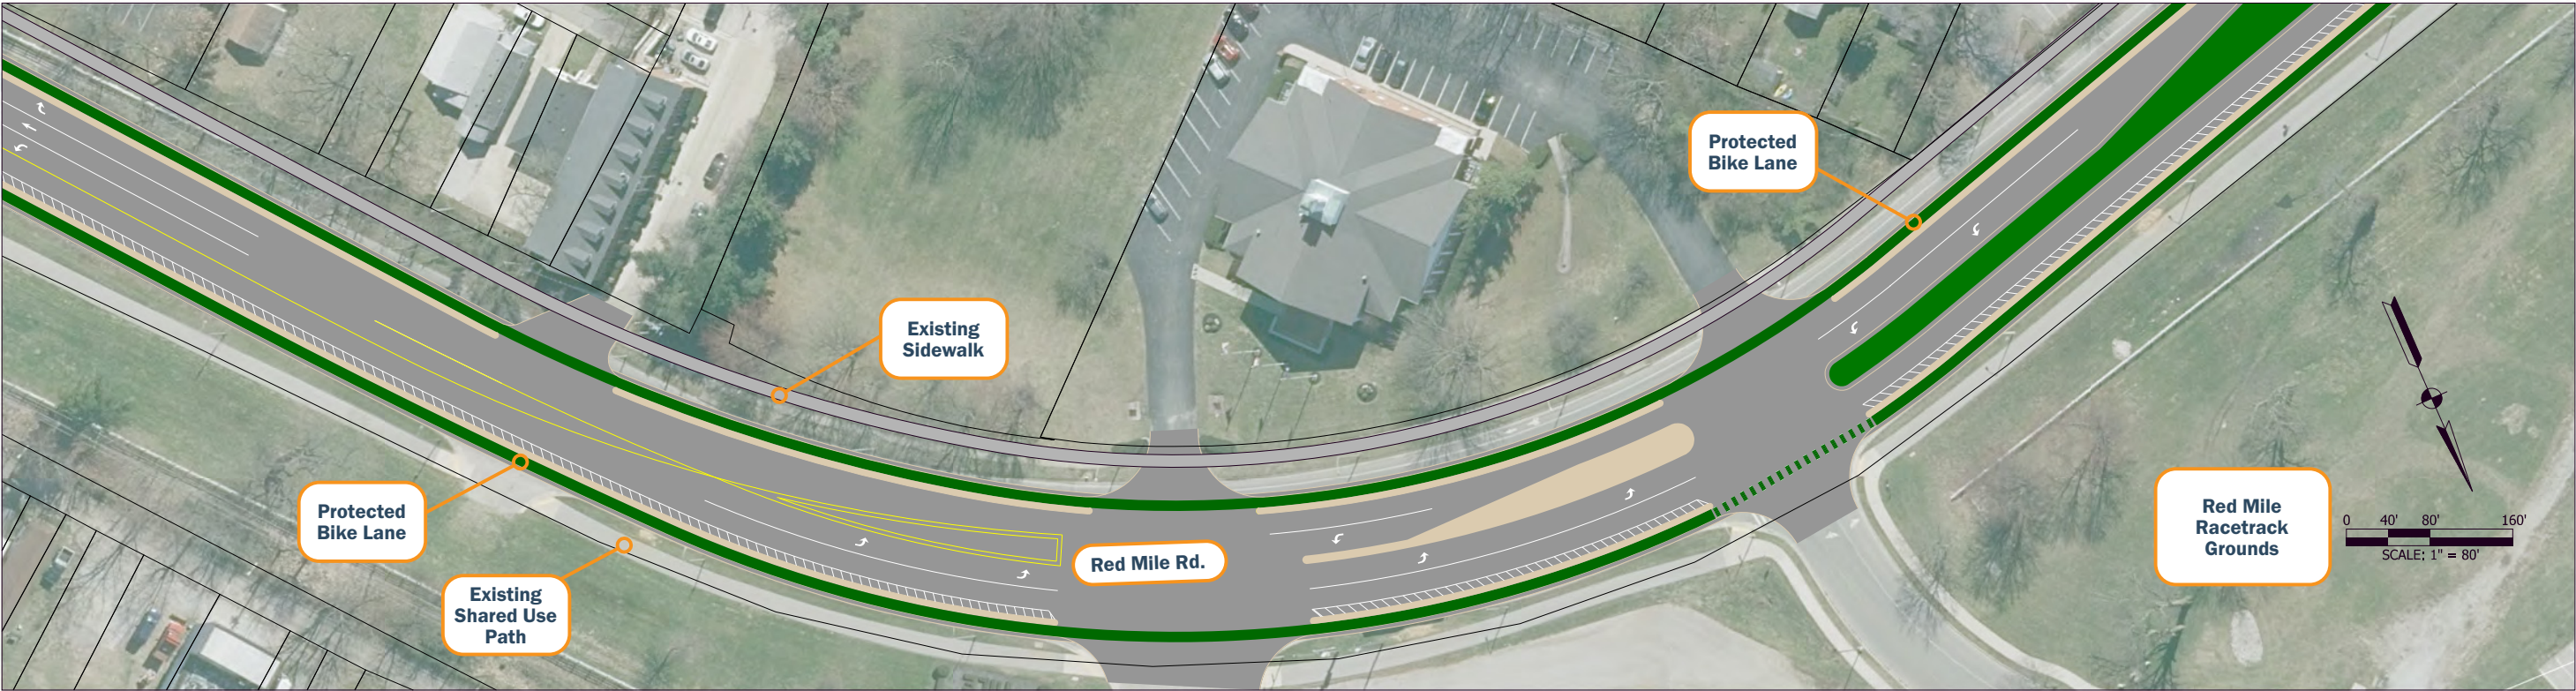

Note: Bike lane markings not shown.

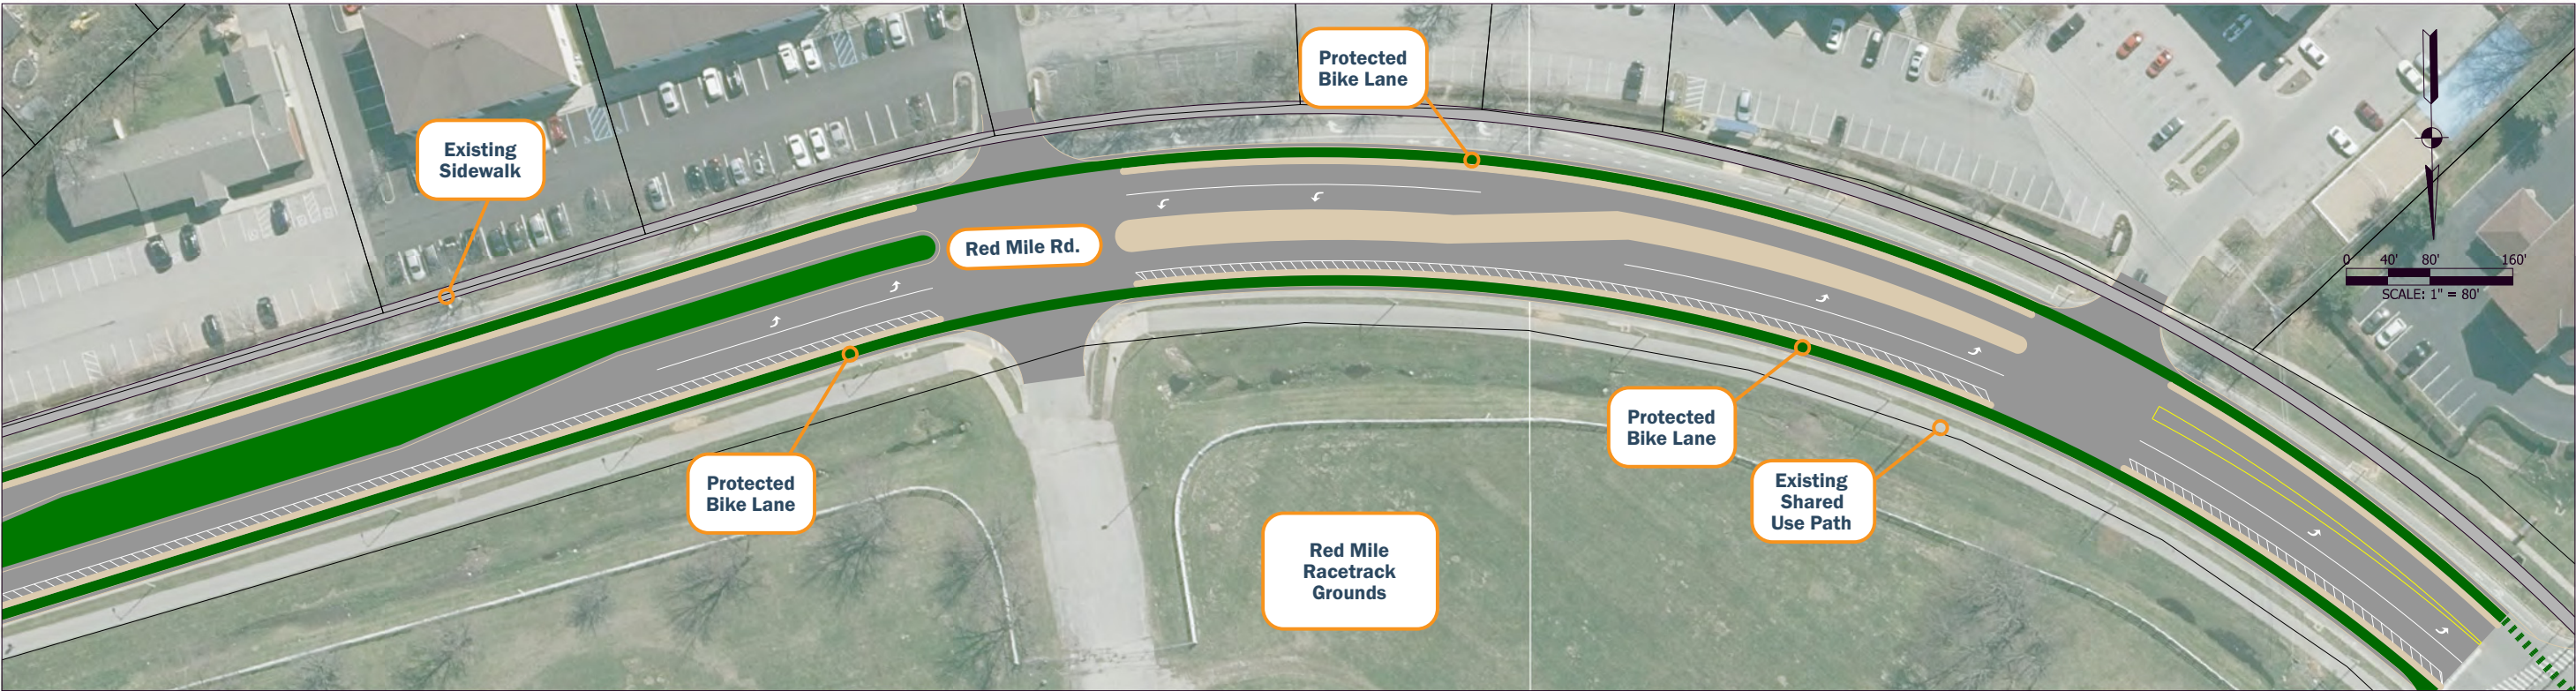


Note: Bike lane markings not shown.

NORTHERN


CENTRAL

SOUTHERN

CENTRAL AREA
RED MILE ROAD SEGMENT

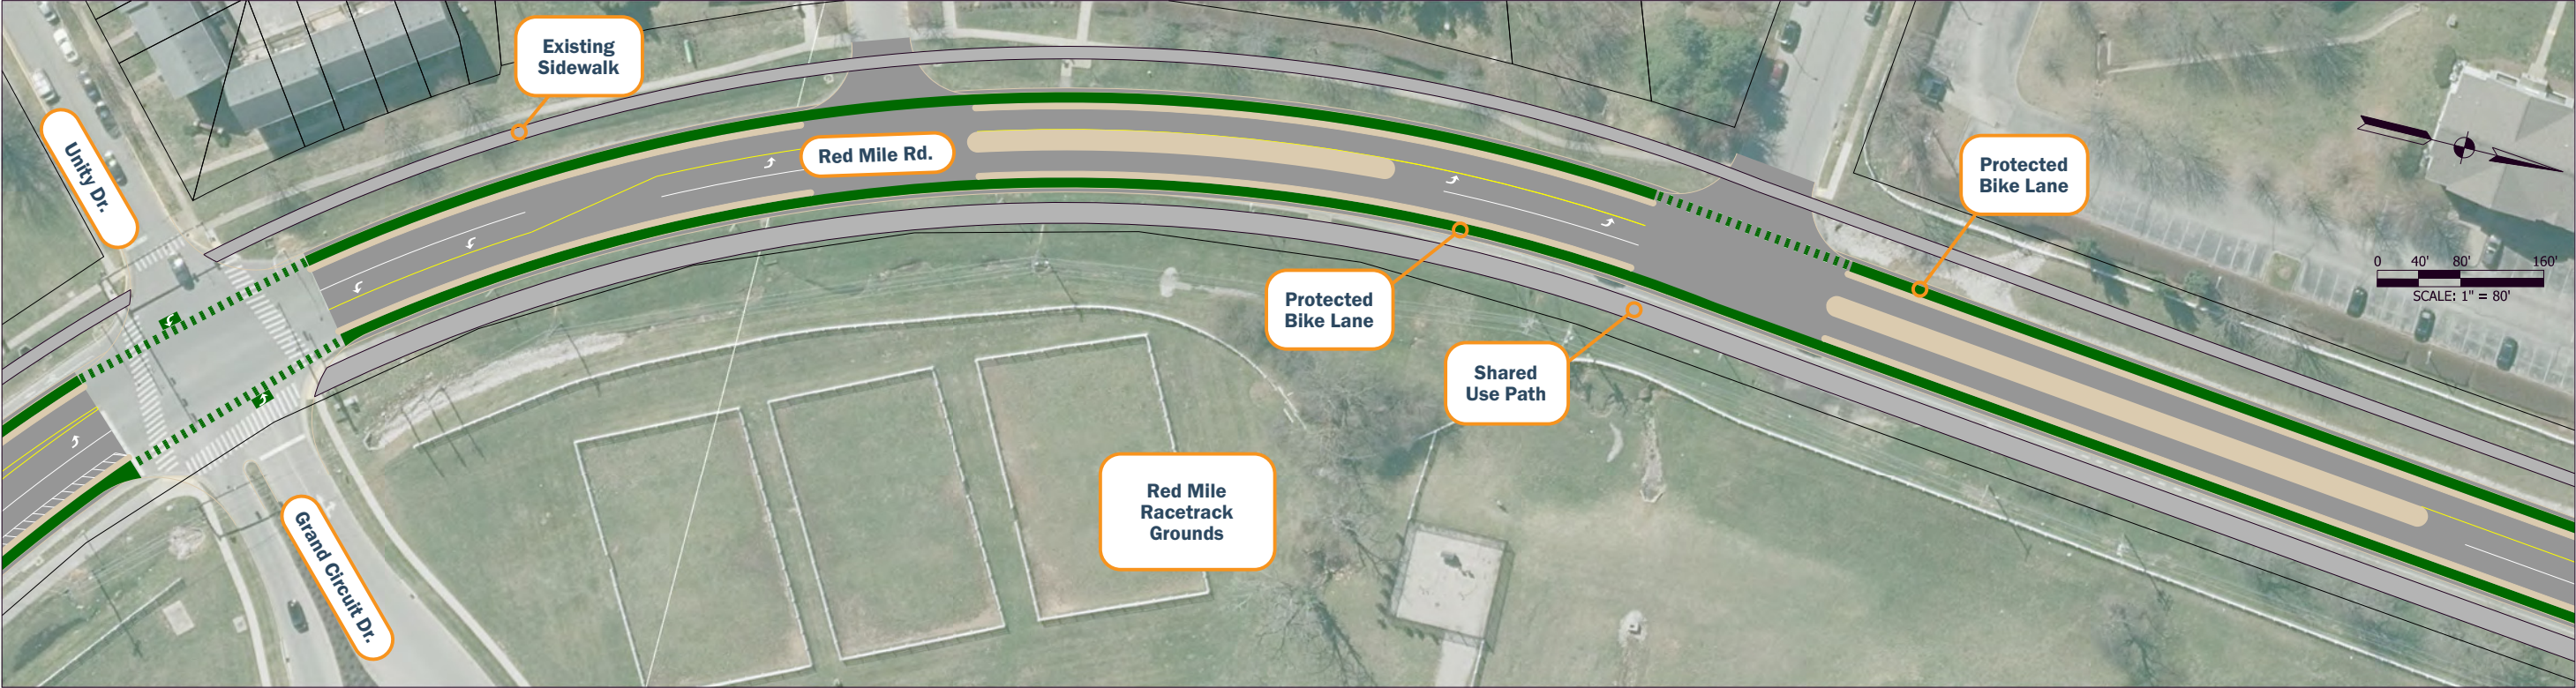

Note: Bike lane markings not shown.

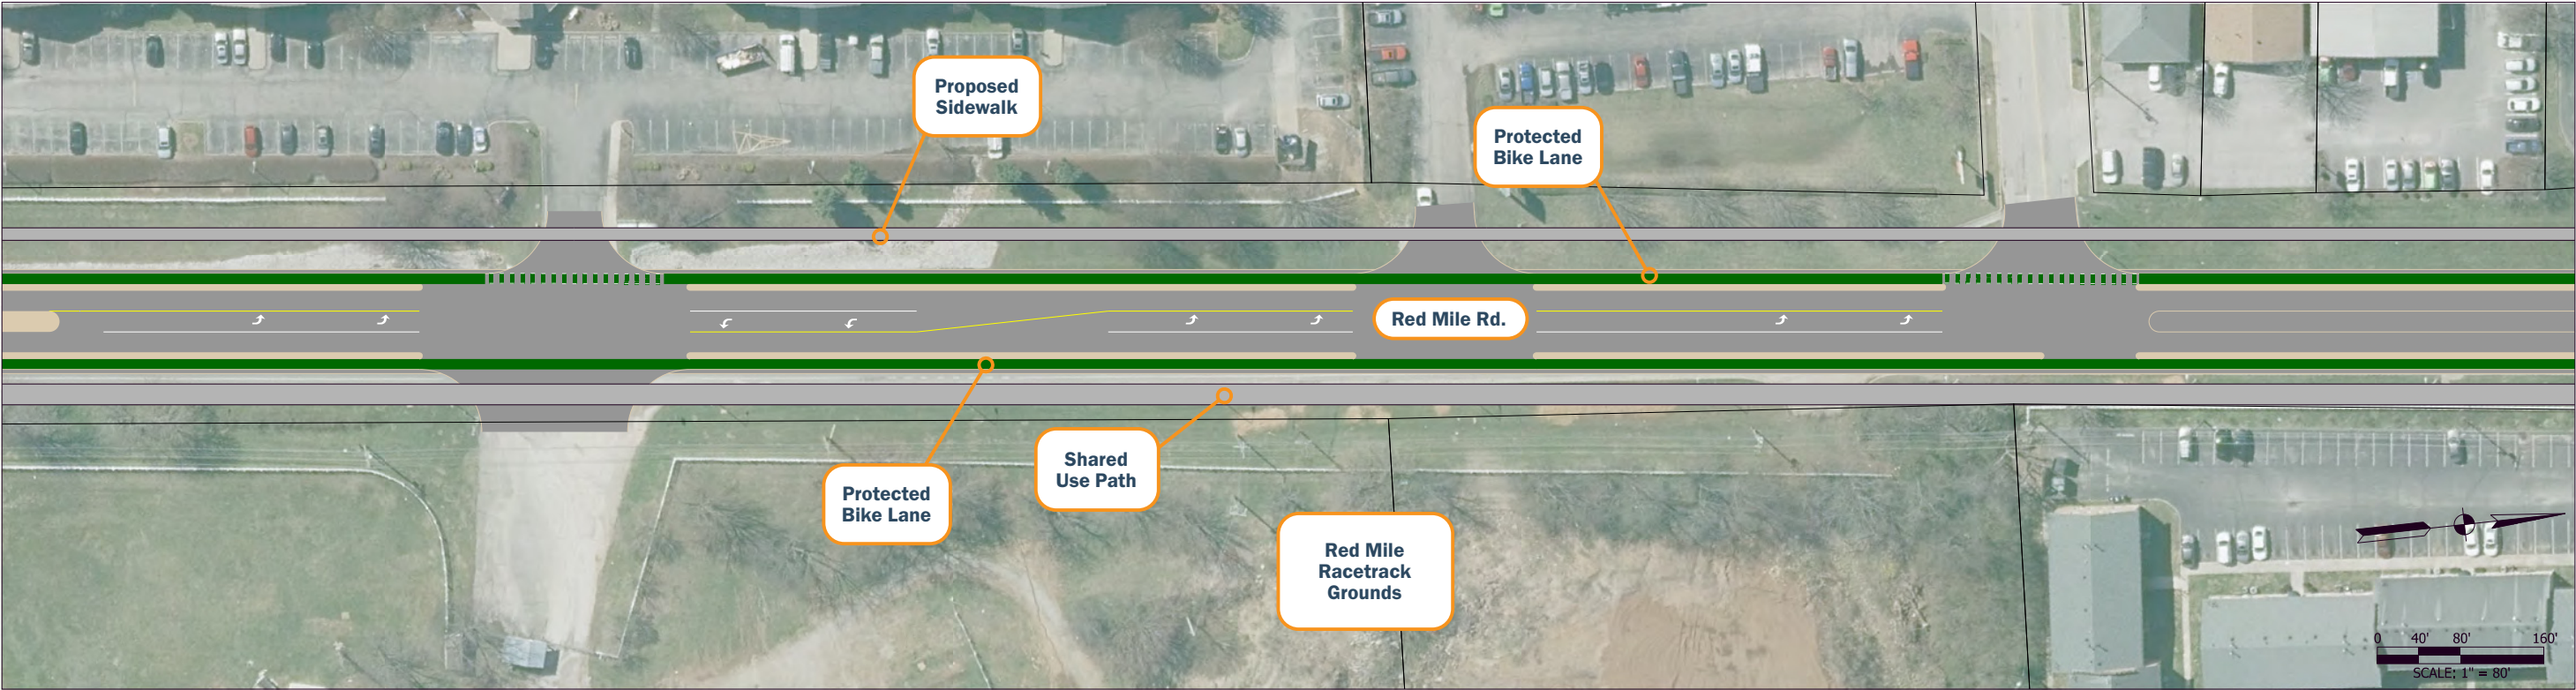

Note: Bike lane markings not shown.



CENTRAL AREA

RED MILE ROAD SEGMENT



CENTRAL AREA

VERSAILLES ROAD INTERSECTION

Existing Conditions


This highly developed commercial and industrial area generates significant pedestrian activity and includes Lextran and school district bus routes. US Highway 60 / Versailles Road is a high-volume roadway with vehicular speeds greater than 40 MPH. This intersection serves as a barrier for cyclists as the Red Mile approach is the only one with bicycle infrastructure.

- Large utility facilities create constraints
- Lextran bus stops at the intersection
- Restrictive grades on the north leg
- Large turning radii
- **Daily Bicycle/Pedestrian County: 20**



Proposed Improvements

- 1 Protected Bicycle Intersection + Bicycle Detection
- 2 Shared Use Path Connection
- 3 Shared Thru/Right on Forbes Road Approach
- 4 Green Space Separation
- 5 Improved Effective Curb Radius
- 6 Transit Stop Improvements
 - Access Management
 - Enhanced Detection

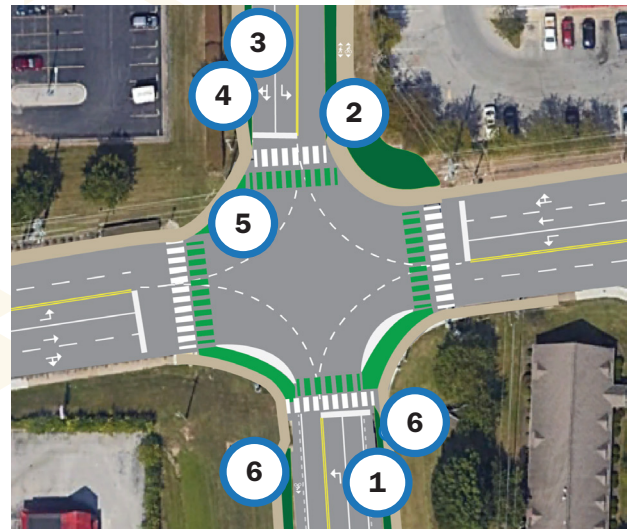

Complete Streets Toolbox: *Transit Stops with Protected Bike Lanes*

There are a variety of best practice design solutions for protected bike lanes mixing with transit stops. This includes guidance from NACTO's Transit Street Design Guide and Urban Bikeway Design Guide. These solutions will be evaluated as part of the implementation plan in the next phase of the study.



Source: Green Lane Project



NORTHERN AREA

FORBES ROAD | VERSAILLES ROAD TO OLD FRANKFORT PIKE

Existing Conditions

- Longest segment of the corridor
- Connection to Town Branch Trail
- Narrow right-of-way
- No sidewalks or bike lanes
- Significant grade changes
- More trucks than other segments



Lextran Routes

24

Land Uses



Commercial // Industrial

SAFETY SCORECARD

Bicycle/Pedestrian Crashes: **3 (Poor)**

Fatal/Serious Injury Crashes: **0 (Great)**

Segment Crashes: **98 (Not Great)**

Excess Expected Crashes: **2.2 (Not Great)**

Level of Safety Service: **3 of 4 (Poor)**

See appendices for more information.



Proposed Improvements

- Shared use path to create safe pedestrian corridor, provide an off-street protected option for cyclists, and maximize available right-of-way
- Install curb and gutter to increase protection of shared use path and encourage slower speeds
- Place trail alignment on east side of Forbes Road (between Versailles Road and Old Frankfort Pike) to minimize driveway conflicts



NORTHERN AREA

OLD FRANKFORT PIKE INTERSECTION

Existing Conditions

In addition to serving many local businesses with significant truck traffic, Old Frankfort Pike is an important east-west connection within the vehicular transportation network. The addition of the Town Branch Trail on this corridor also makes it the most important bicycle connection to downtown Lexington. Mixing of trucks and trail users here makes improving intersection safety a priority.

- Medium-to-low volume intersection with more truck traffic than other locations
- Town Branch Trail crossing
- Significant grade challenges on south leg
- Recent improvements to add turn lanes
- **Daily Bicycle/Pedestrian Count: 5**



Proposed Improvements

- 1 Add Shared Use Path and Sidewalks
- 2 Shorten Crosswalks
- 3 Improved Effective Curb Radius
 - Pedestrian Scale Lighting
 - Concrete or High Friction Surface Treatment (Northbound Approach)
 - Thermoplastic Cross Lane Rumble Strips for Downhill Approaches
 - Enhanced Detection
 - Pedestrian Signals for New Crosswalks



Long Term Innovative Intersection Concept: Single Lane Roundabout

Single lane roundabouts have numerous safety and mobility benefits by reducing conflict points and slowing vehicles down but not always forcing a stopping situation. Right-of-way would need to be acquired to fit a roundabout in the space, but the benefits would be important for traffic calming in the area with more bicyclists and pedestrians due to the confluence of two trails. The vehicular traffic volumes at this intersection meet the criteria for a single lane roundabout.



NORTHERN

CENTRAL

SOUTHERN


NORTHERN AREA

LEESTOWN ROAD INTERSECTION

Existing Conditions


Numerous driveways and a parking lot very close to this intersection create a dangerous environment for all users, especially pedestrians. A recent KYTC study found numerous rear end vehicular crashes at the intersection and angle crashes at access points within 200 feet of the intersection.

- Very poor sidewalk connectivity
- Numerous rear end and angle crashes
- Closely spaced driveways nearby
- East-west bicycle lanes on Leestown Road / Main Street
- **Daily Bicycle/Pedestrian Count: 66**

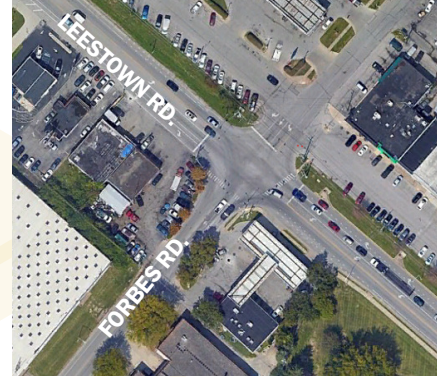

Proposed Improvements

- 1 Improved Effective Curb Radius
 - 2 Shared Thru/Right on Main St Approach
 - 3 Access Management
 - 4 Add Separated Bicycle and Pedestrian Facilities and Square the Crosswalks
- Pedestrian Scale Lighting
 - Transit Stop Improvements
 - Enhanced Detection

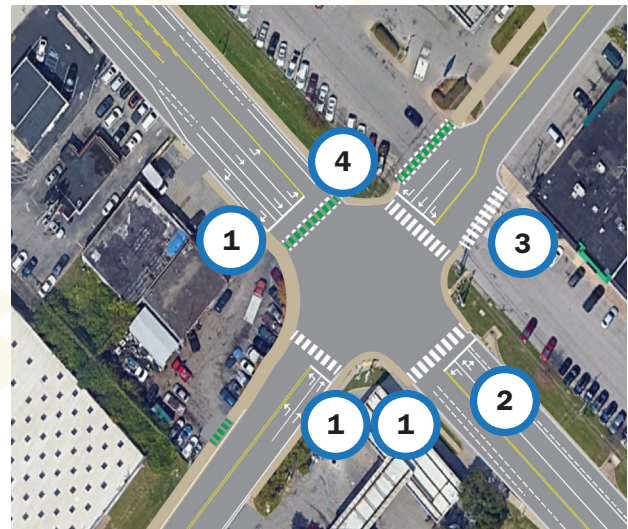

Long Term Innovative Intersection Concept: *Single Lane Roundabout with Mini Roundabout at Antique*

A single lane roundabout drastically reduces fatal and serious injury crashes while also boosting overall flow and bicycle/pedestrian safety. Single lane roundabouts can accommodate up to 20,000 vehicles per day and this intersection is close to the upper threshold. A mini roundabout at Antique Drive will improve flow of the area and limit conflict points.



Mini Roundabout, KYTC

NORTHERN

CENTRAL

SOUTHERN

NORTHERN AREA
FORBES ROAD SEGMENT



Note: Bike lane markings not shown.




NORTHERN

CENTRAL

SOUTHERN

NORTHERN AREA
FORBES ROAD SEGMENT

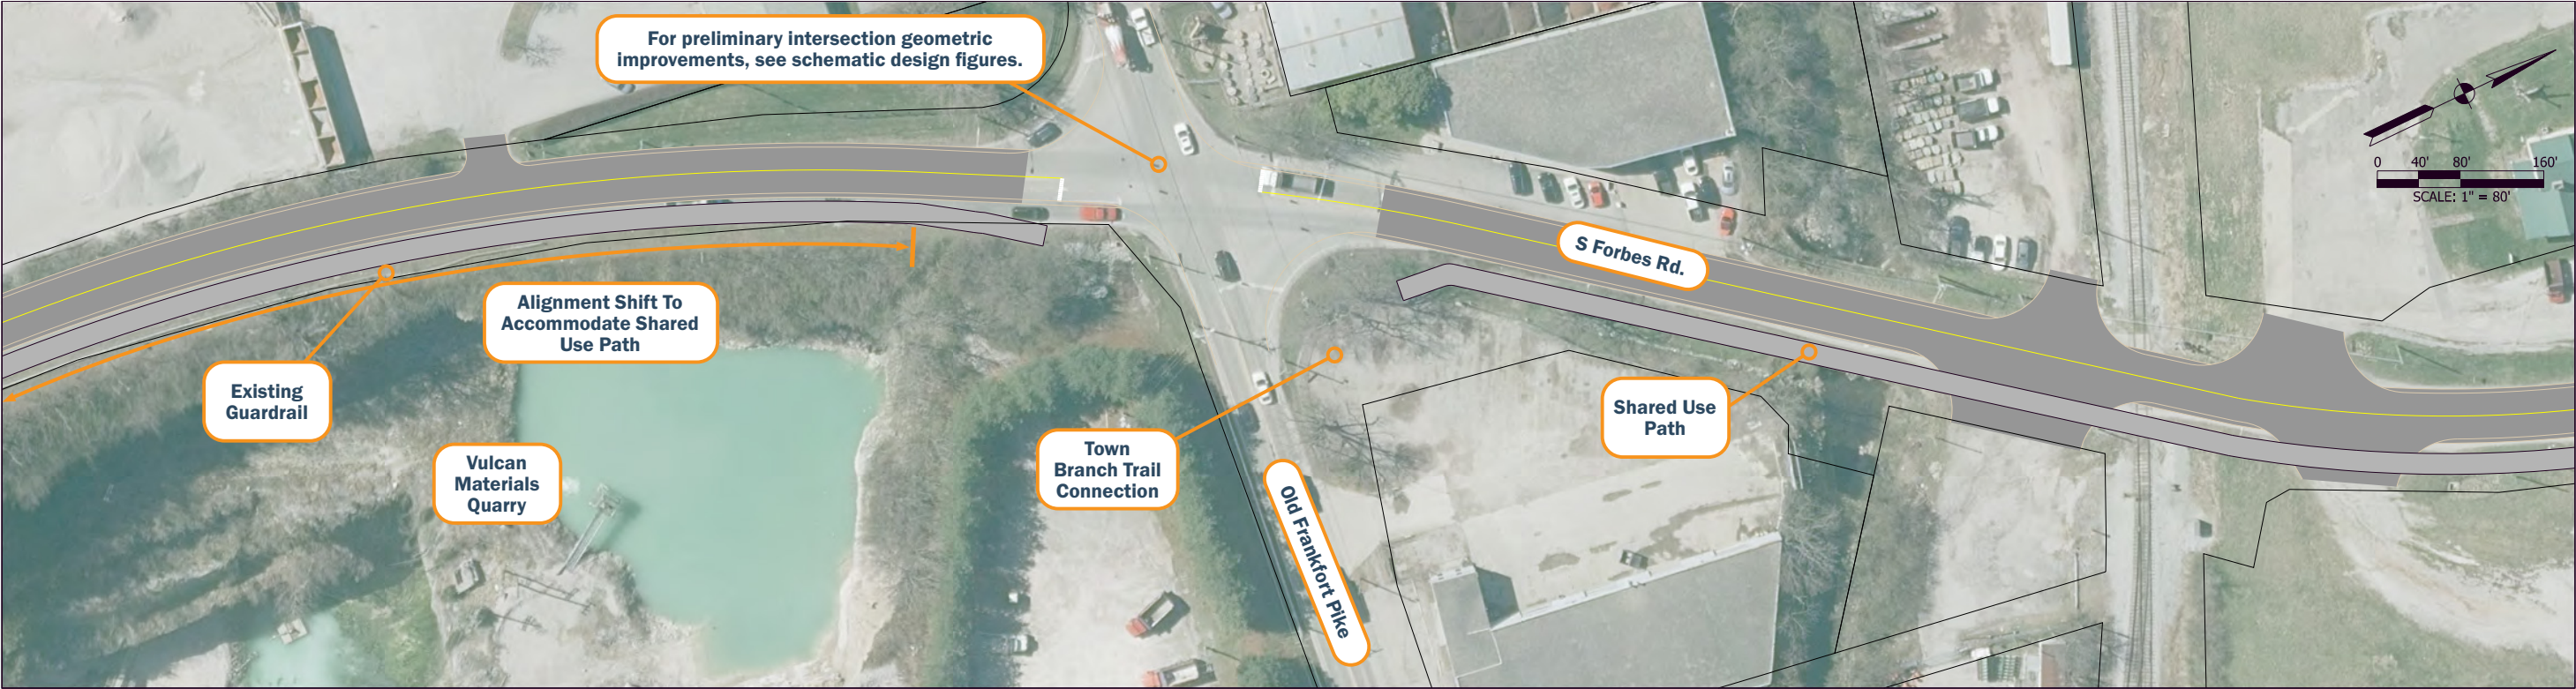

Note: Bike lane markings not shown.



NORTHERN

CENTRAL

SOUTHERN

NORTHERN AREA
FORBES ROAD SEGMENT



Note: Bike lane markings not shown.




“This connection is so important. This corridor has a very high biking population, and has much stronger bus service than many corridors in Lexington. A strong trail would be an incredible multi-modal connection that would not only make non-car transportation easier -- it would encourage it!”

- OPEN RESPONSE FROM SURVEY #1



The Campus to Commons Trail will fill many of the bicycle and pedestrian gaps in the corridor.

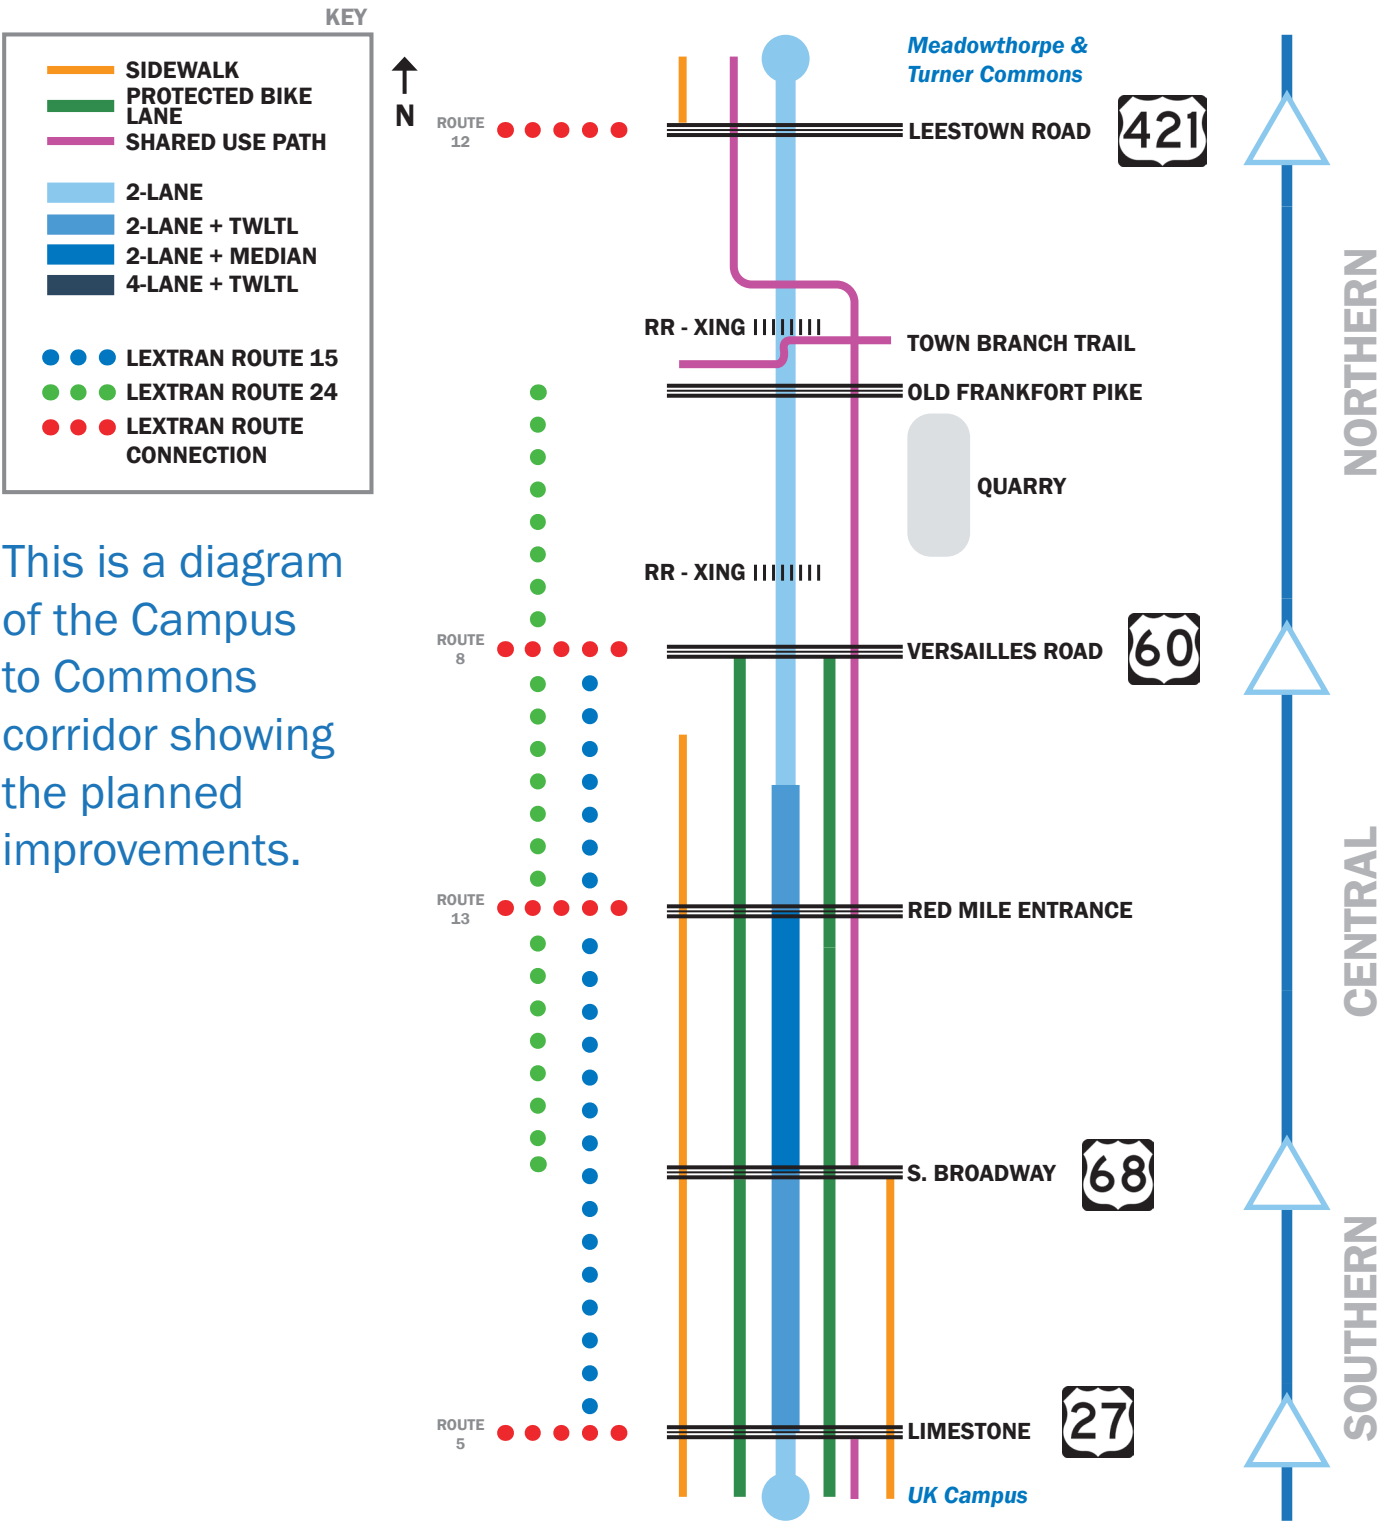

This is a diagram of the Campus to Commons corridor showing the planned improvements.

APPENDICES




CAMPUS TO COMMONS
TRAIL CONNECTIVITY STUDY

Appendix 1 – Related Planning Studies and Documents

Lexington Area Bicycle & Pedestrian Master Plan

This [planning study](#) was completed by the Lexington Area Metropolitan Planning Organization to outline a vision and path to a more walkable and bicycle-friendly community. This includes corridors and intersections that are identified for priority investments. The Campus to Commons corridor is identified in the plan as a Major Bikeway.

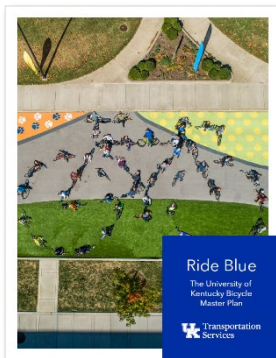


Ride Blue – The University of Kentucky Bicycle Master Plan


The [University of Kentucky Bicycle Master Plan](#) summarizes existing conditions analyses, extensive community outreach, and the development of priority bicycle infrastructure projects for the university campus and for adjacent City streets. In addition to recommended improvements for the Virginia Avenue corridor, the plan discusses proposed improvements along Huguelet Drive. These projects were assessed as part of the Campus to Commons study.

Kentucky Transportation Cabinet Complete Streets, Roads, and Highways Manual

The Kentucky Transportation Cabinet (KYTC) published the first edition of the [Complete Streets, Roads, and Highways Manual](#) in August 2022. The plan serves as a “guide to implementing safe and equitable transportation strategies for facilities in rural and urban Kentucky.” It highlights important design elements and strategies for improving the safety of Kentucky roadways, particularly for vulnerable road users, or those users not protected by a motor vehicle.

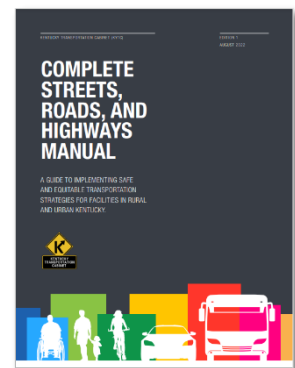

Red Mile Development Plan




The Red Mile Development Plan is a detailed planning document that outlines planned development of the Red Mile Racetrack property, including re-zoning proposals for mixed-use development. A review of the local transportation system and vehicular traffic counts is included. Additionally, the plan shows the concept for a ten-foot shared use path along Red Mile Road referred to as the “Red Mile Greenway Trail”, a portion of which has already been installed along the Campus to Commons corridor. Intersection and streetscape improvements are proposed as well.



KYTC D7 Intersection Studies: Leestown Road (US 421) at Forbes Road

In 2023, KYTC published an intersection study at one of the major intersections of the Campus to Commons trail corridor: Leestown Road and Forbes Road. This study analyzed the crash history of the intersection and evaluated if exclusive left turn lanes were warranted for Forbes Road. While left turn phases were not warranted for Forbes Road, smaller improvements to reduce rear end and angle collisions were proposed. These include property access management and improved pedestrian curb ramps.

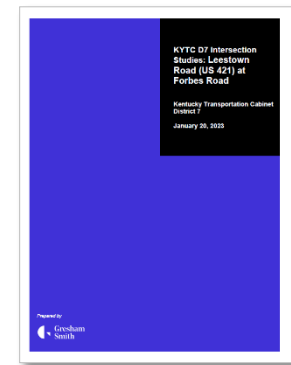

Imagine Nicholasville Road

[Imagine Nicholasville Road](#) is a corridor study which presents a transformative vision for the Nicholasville Road corridor to enhance safety and efficiency for users of all transportation modes. This includes significant transit improvements to one of Lextran's busiest bus routes, dedicated bicycle and pedestrian facilities, and innovative intersections for better traffic safety and flow. The study also outlines proposed developments for

underutilized land uses on the corridor. The recommendations from Imagine Nicholasville Road influenced the Campus to Commons Study's assessment of the Virginia Avenue/Huguelet Drive intersection.



Appendix 2 – Bikeway Selection Guide

Sections 4 and 5 of the Federal Highway Administration (FHWA) Bikeway Selection Process and Guide Outline were referenced to guide the trail alignment planning and selection of a preferred facility (see Figure A2.1). Identifying the preferred bikeway type includes an assessment of the context of the corridor with the intent of providing the safest and most comfortable route for bicyclists. This approach was expanded to encompass both bicycle and pedestrian facilities which in the case of shared use paths is one in the same. This process includes evaluation of each segment of the corridor to ensure that a safe, direct, intuitive and intentional design solution is presented increasing the bikability and walkability of the corridor.

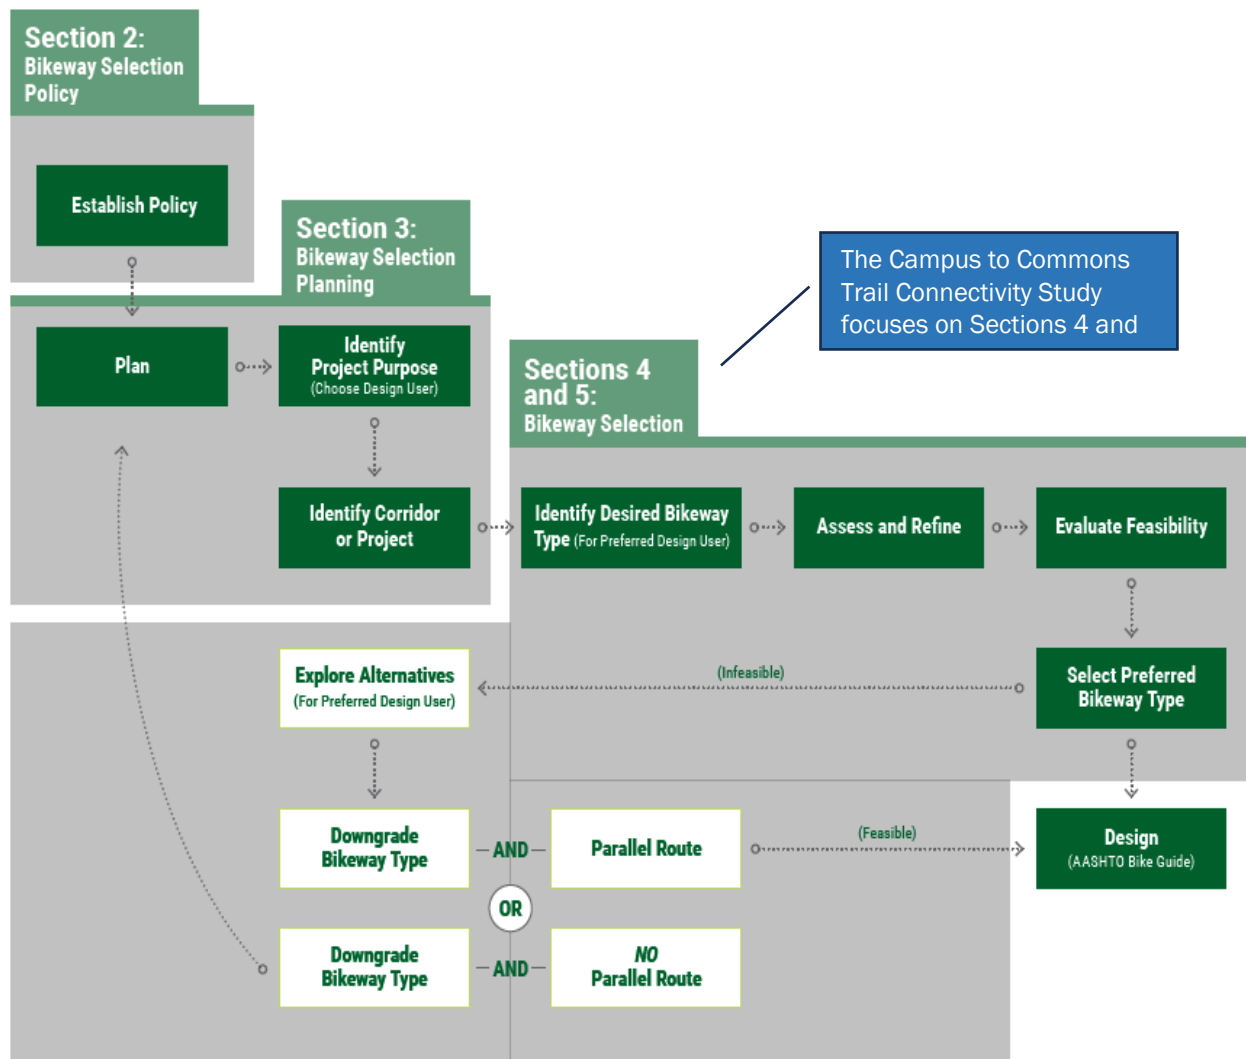


Figure A2.1 - FHWA bikeway selection process and guide outline (comment added)



Appendix 3 – Safety Data

Safety Analysis

The following table shows the frequency of rear end, angle, and sideswipe same direction crashes at the five main intersections of the study area from the five-year crash data (2018-2022) analyzed for this study. As per the table, S Broadway intersection is the worst area for these three crash types. S Limestone is vulnerable for sideswipe and rear end crashes. Versailles Road intersection is vulnerable for rear end crashes. A correlation was found where wet roadway condition crashes make up a higher-than-normal percentage of crashes, as shown in parenthesis in Table A3.1 below. Wet roadway crashes, often influenced by poor pavement quality or something similar, may change as some of the routes have been repaved recently or will be repaved soon as part of a traditional roadway repaving maintenance schedule.

Table A3.1 - Crash Data (2018-22) Count

Intersection Name	Rear End (Wet Crash)	Angle (Wet Crash)	Sideswipe Same Direction (Wet Crash)
S Limestone	75 (21)	11 (3)	40 (4)
S Broadway	88 (25)	69 (14)	54 (10)
Versailles Rd	48 (5)	28 (4)	13 (3)
Old Frankfort	11 (2)	8 (1)	2 (0)
Leestown Rd	34 (13)	20 (6)	5 (1)

The crash trends for the total study area are highlighted in the figures below. The crash trends show the weather condition, lighting condition, roadway condition, and the crashes by KABCO code (K is for fatal crash, A is for serious injury crash, B is for apparent injury crash, C is for possible injury crash, and O is for property damage only).



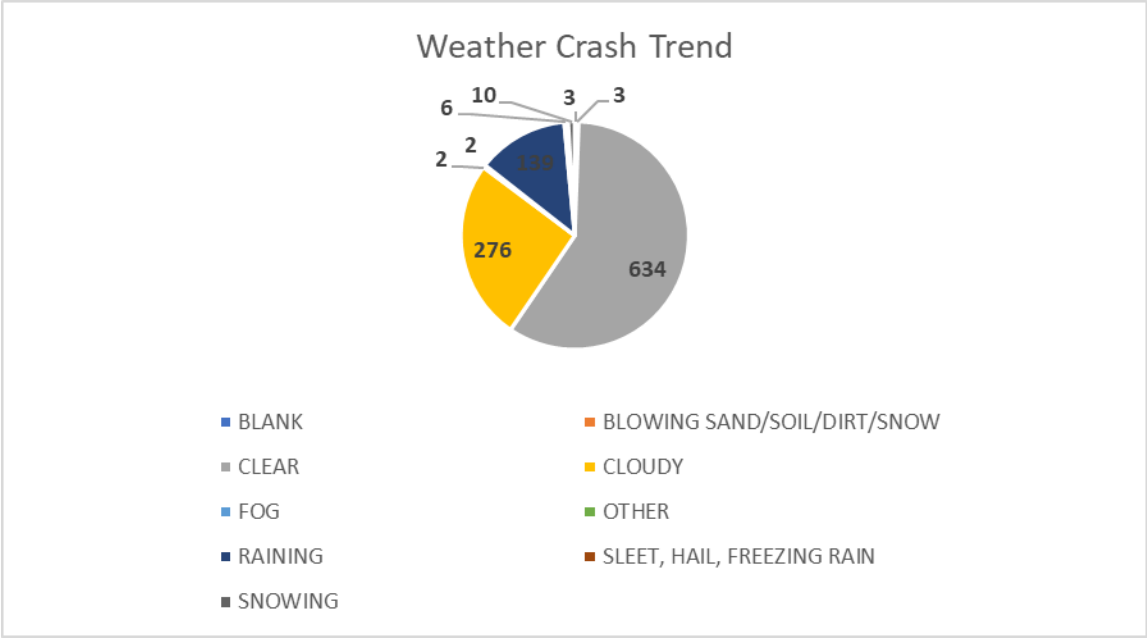


Figure A3.1 - Summary of five-year crash data by weather conditions.

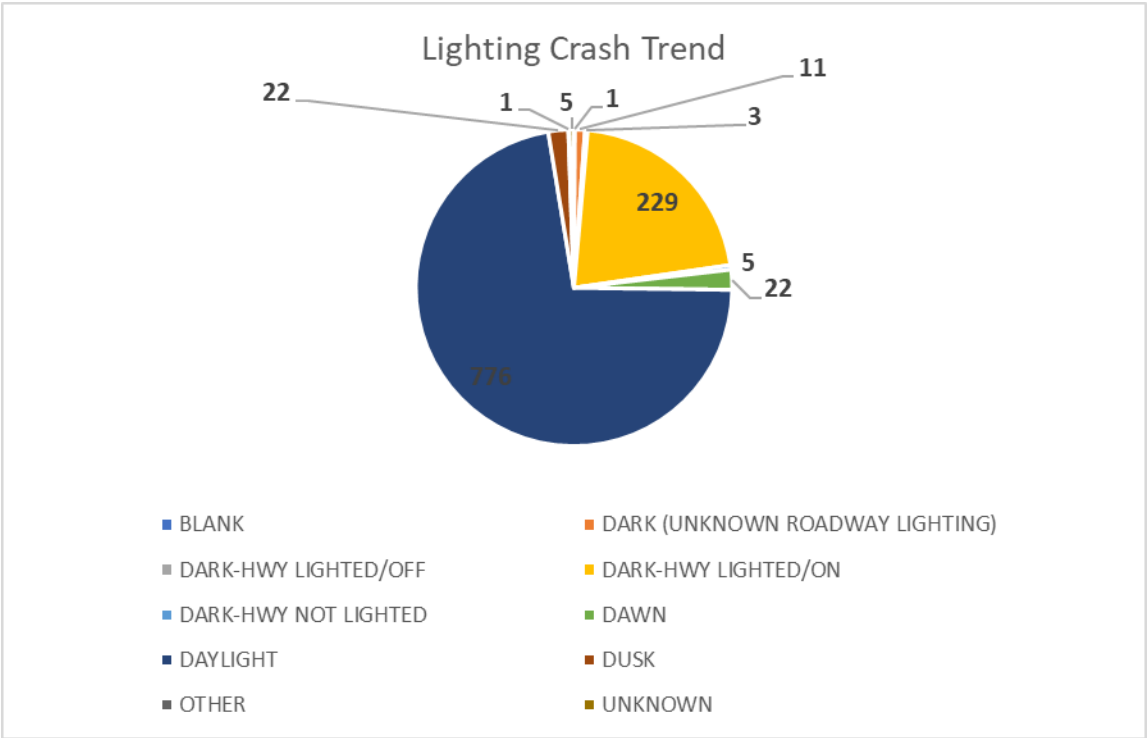


Figure A3.2 - Summary of five-year crash data by lighting conditions.



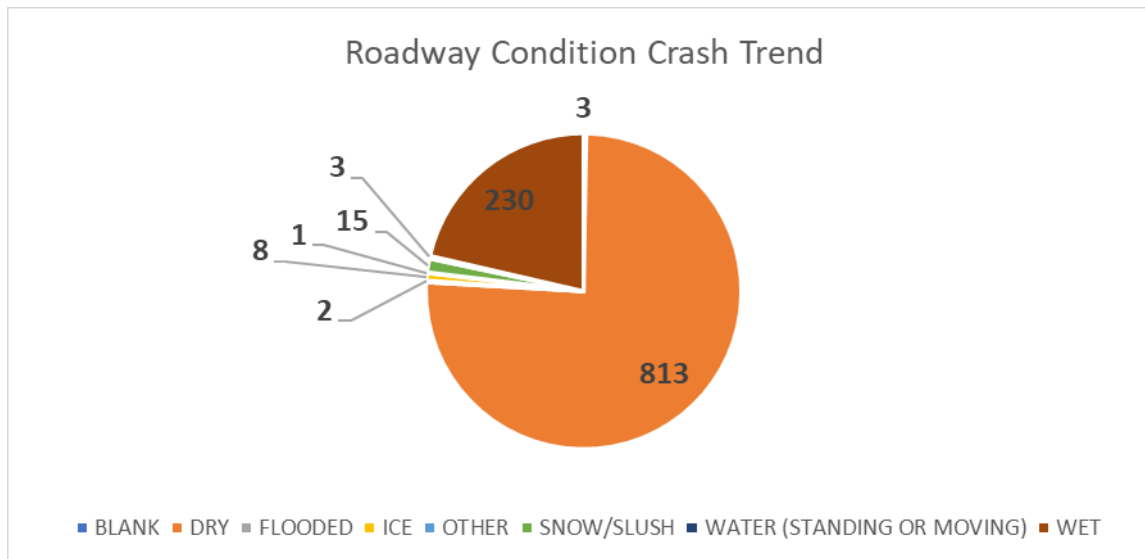


Figure A3.3 - Summary of the five-year crash data by roadway conditions.

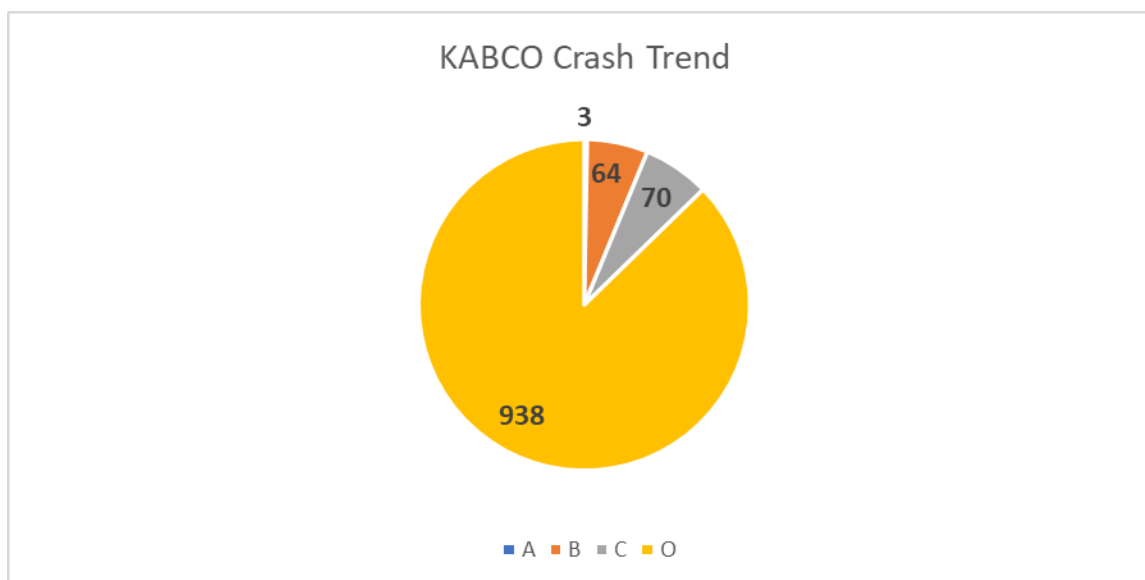


Figure A3.4 - Summary of the five-year crash data by severity of injury.

K – Fatal

A – Incapacitating

B – Non-incapacitating

C – Possible injury

O – No injury detected



Excess Expected Crashes Analysis

Excess Expected Crashes (EECs) is a safety evaluation technique to compare a facility's safety performance compared to similar facilities across the state and weighing it through geometric and traffic factors. The corridor is broken into segments and the five major intersections to highlight where this facility is performing compared to similar corridors. Overall, the corridor is experiencing more crashes than similar corridors with an overall EEC of 124 over five years, or around 25 per year. The intersection of Limestone has the highest EEC along the corridor for intersections and the segment from Limestone to Broadway has the highest segment EEC. Table A3.2 and Figure A2.1 below show the EECs by intersection and segment throughout the corridor.

Table A3.2 - Excess Expected Crashes by Intersection and Segment

Type	Name	Excess Expected Crashes
Intersection	Limestone	35.196
Segment	Limestone to Broadway	52.8
Intersection	Broadway	19.204
Segment	Broadway to Versailles	10.6
Intersection	Versailles	13.446
Segment	Versailles to Old Frankfort	2.7
Intersection	Old Frankfort	-14.471
Segment	Old Frankfort to Leestown/Main	2.2
Intersection	Leestown/Main	2.45



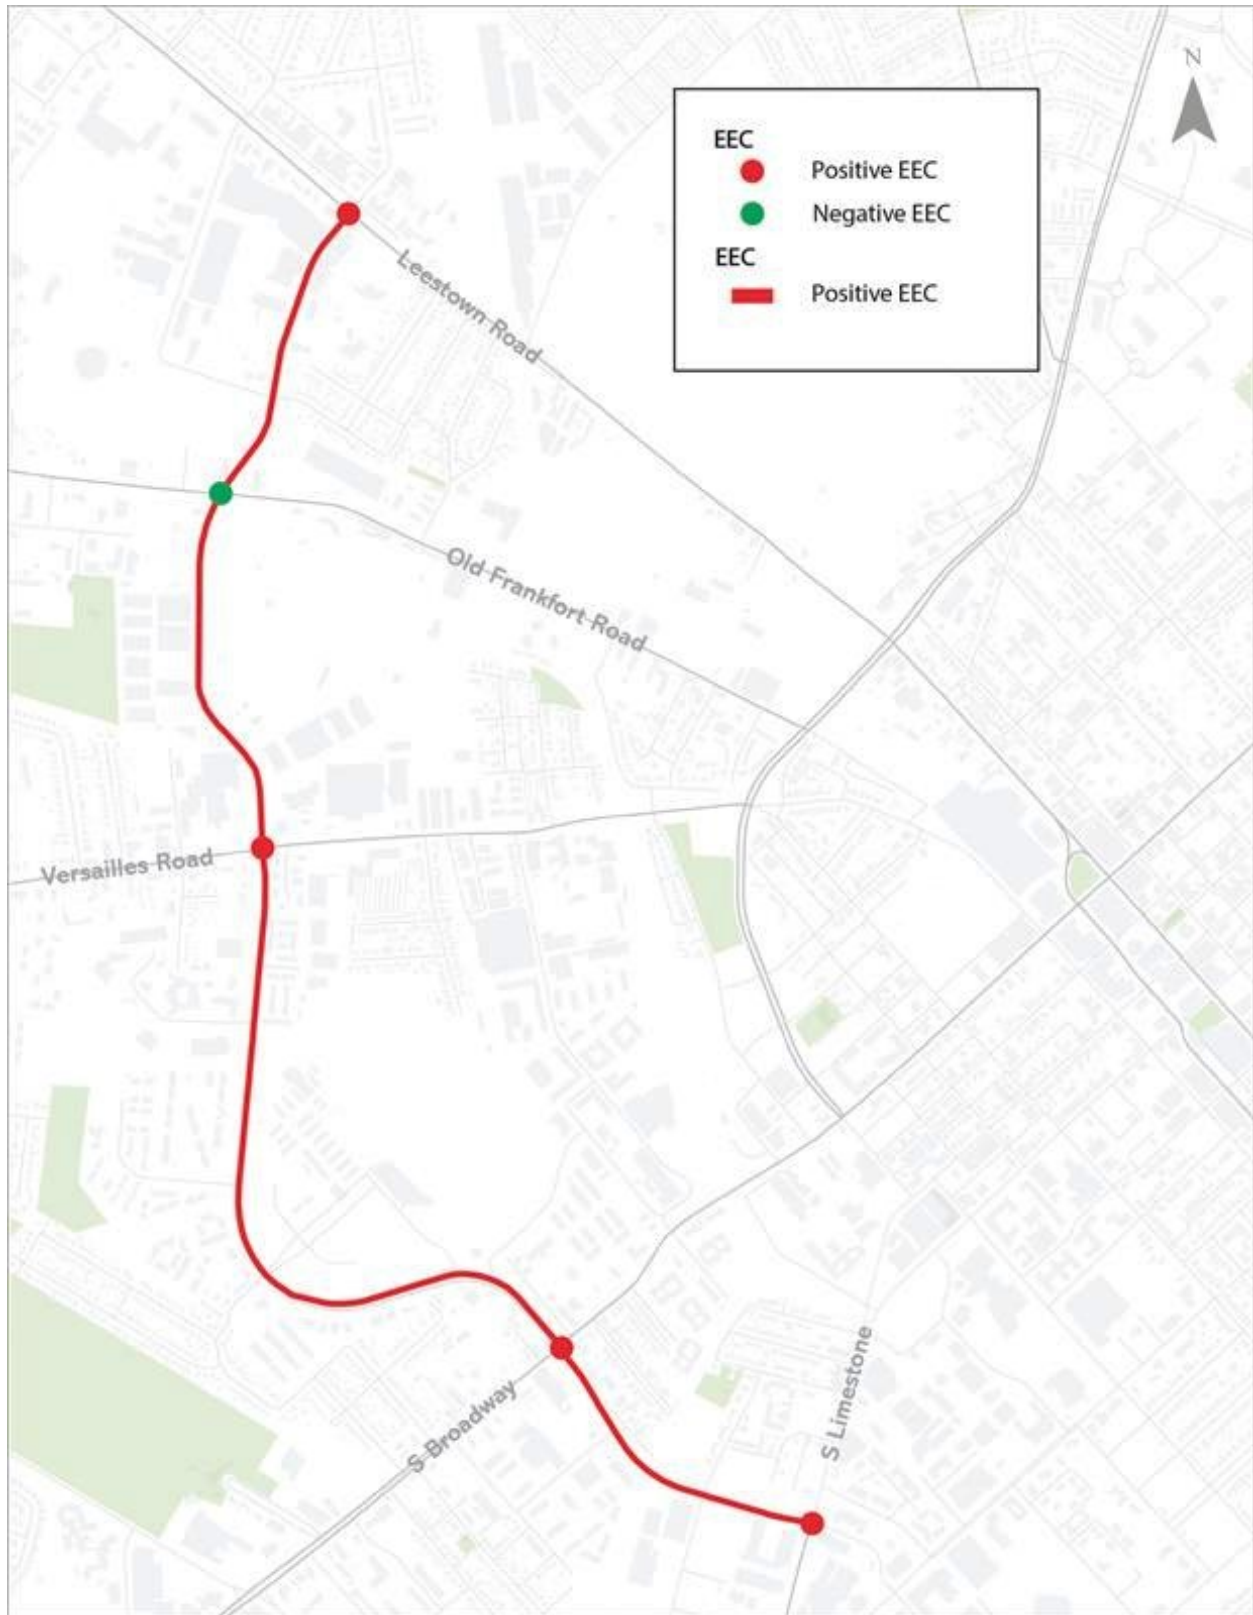


Figure A2.4 - Excess Expected Crashes Along the Corridor



Appendix 4 – Traffic Data and Modeling

A detailed traffic study was conducted using the Synchro model, based on data from Streetlight and KYTC. The study focused on the five major intersections: South Limestone at Virginia Avenue/Huguelet Drive, South Broadway at Virginia Avenue/Red Mile Road, Versailles Road at Red Mile Road/South Forbes Road, Old Frankfort Pike at South Forbes Road, and West Main Street/Leestown Road at South Forbes Road.

A traffic analysis was conducted during the AM peak (7:15 AM to 8:15 AM) and PM peak (4:30 PM to 5:30 PM) hours. The intersection Level of Service (LOS) and Delay measures for both the AM and PM peaks are highlighted in Table A4.2. In urban environments, LOS D is considered acceptable for signalized intersections. LOS thresholds and subsequent descriptions of each grade for signalized intersections are listed in Table A4.1.

Table A4.1 – Level of Service Criteria for Signalized Intersections

Level of Service (LOS)	Average Delay (sec/veh)	Level of Service Description
A	≤ 10	Little or no delay
B	> 10 and < 20	Short traffic delays
C	> 20 and < 35	Average traffic delays
D	> 35 and < 55	Long traffic delays
E	> 55 and < 80	Very long traffic delays
F	> 80	Severe congestion

Table A4.2 - Existing Conditions – Intersection Delay/LOS Summary

Intersection	AM – Avg. Delay (sec/veh)	AM – LOS	PM – Avg. Delay (sec/veh)	PM – LOS
S Limestone at Virginia Avenue	50.6	D	55.9	E
S Broadway at Virginia Avenue	45.3	D	50.1	D
Versailles Road at Red Mile/S Forbes Road	39.1	D	45.5	D
Old Frankfort Pike at S Forbes Road	10.6	B	15.8	B
W Main Street at S Forbes Road	22.3	C	29.3	C



Base Model Intersection Analysis

South Limestone at Virginia Avenue / Huguelet Drive

At the intersection of South Limestone and Virginia Avenue/Huguelet Drive, left turn phases operate as protected only on mainline and side-streets during all times of day. The signal control type here is actuated-coordinated, with a cycle length established at 180 seconds during both peak hours. All four pedestrian phases include a walk time of seven seconds. The Flash Don't Walk time is 26 seconds for the northbound and southbound approaches and 22 seconds for the westbound and eastbound approaches.

The mainline street, S Limestone, operates at an acceptable LOS C during both peak periods, while the side-streets suffer from severe congestion/delays, currently experiencing LOS E and F during the AM and PM peaks, shown in Table A4.3. Though the eastbound approach operates at a failing LOS under existing conditions, the 95th percentile queue is calculated no further than 340' in either peak, while adequate storage exists up to 450'. For the westbound approach, this queue length extends to no more than 195' with an available storage up to 225'.

Table A4.3 - Existing Conditions – S Limestone at Virginia Avenue Approach Analysis

Approach	AM – Avg. Delay (sec/veh)	AM – LOS	PM – Avg. Delay (sec/veh)	PM – LOS
Northbound – S Limestone	38.6	D	32.9	C
Southbound – S Limestone	48.1	D	41.6	D
Eastbound – Virginia Avenue	73.8	E	84.0	F
Westbound – Huguelet Drive	64.4	E	91.5	F

South Broadway at Virginia Avenue / Red Mile Road

At the intersection of South Broadway and Virginia Avenue/Red Mile Road, left turn phases are permitted and protected at all times of day. Actuated-coordinated signal control is used here, and its cycle length is set at 180 seconds for both peak hours. The walk time for the intersection's pedestrian crossing signals is five seconds for north and southbound travel and seven seconds for east and westbound travel. Consequently, the Flash Don't Walk phase lasts 18 seconds for crossings in both directions (east and west) and 15 seconds for crossings in both directions (north and south).

The mainline street, S Broadway, operates at an acceptable LOS D during both peak periods, while the side-streets suffer from severe congestion/delays, currently experiencing LOS D, E and F during the AM and PM peaks, shown in Table A4.4.

Table A4.4 - Existing Conditions – S Broadway at Virginia Avenue Approach Analysis



Approach	AM – Avg. Delay (sec/veh)	AM – LOS	PM – Avg. Delay (sec/veh)	PM – LOS
Northbound – S Broadway	37.4	D	41.2	D
Southbound – S Broadway	31.0	C	36.9	D
Eastbound – Red Mile Road	94.1	F	75.1	E
Westbound – Virginia Avenue	52.6	D	76.7	E

Versailles Road at Red Mile Road / South Forbes Road

At all times of day, left turn phases at the intersection of Versailles Road and Red Mile Road/South Forbes Road are permitted and protected. During both peak hours, the cycle length of the actuated-coordinated signal control type is set at 180 seconds. The configuration of the pedestrian crossing signals is such that the walk time for eastbound and westbound directions is seven seconds, and for northbound and southbound directions it is six seconds. For east, south, and northbound routes, the Flash Don't Walk phase lasts 17 seconds; however, it lasts 25 seconds for westbound directions.

Table A4.5 illustrates that while southbound S Forbes Road and the side streets function at an acceptable LOS C during both peak periods, northbound Red Mile Road suffers from extreme congestion and delays, currently suffering LOS E and F during AM and PM peak periods, respectively.

Table A4.5: Existing Conditions – Versailles Road at Red Mile/S Forbes Road Approach Analysis

Approach	AM – Avg. Delay (sec/veh)	AM – LOS	PM – Avg. Delay (sec/veh)	PM – LOS
Northbound – Red Mile Road	67.5	E	84.2	F
Southbound – S Forbes Road	51.6	D	41.2	D
Eastbound – Versailles Road	31.8	C	34.6	C
Westbound – Versailles Road	24.6	C	36.7	D

Old Frankfort Pike at South Forbes Road

At the intersection of Old Frankfort Pike and South Forbes Road, left turn phases operate as permitted only on during all times of day. During both peak hours, the cycle length of the actuated-coordinated signal control type is set at 180 seconds. The westbound pedestrian crossing signals are set up with a seven-second walk period and an eighteen-second Flash Don't Walk phase. For the remaining approaches, there are no pedestrian walk signals available.



As shown in Table A4.6, the mainline and the side streets at the intersection of Old Frankfort Pike and South Forbes Road operate at acceptable LOS A, B, and C during both peak periods.

Table A4.6 - Existing Conditions – Old Frankfort Pike at S Forbes Road Approach Analysis

Approach	AM – Avg. Delay (sec/veh)	AM – LOS	PM – Avg. Delay (sec/veh)	PM – LOS
Northbound – S Forbes Road	11	B	21.4	C
Southbound – S Forbes Road	12.4	B	18.4	B
Eastbound – Old Frankfort Pike	8.9	A	9	A
Westbound – Old Frankfort Pike	9.5	A	11.6	B

West Main Street / Leestown Road at South Forbes Road

At the intersection of West Main Street/Leestown Road and South Forbes Road, left turn phases operate as permitted and protected on mainline and permitted on side-streets during all times of day. The signal control type here is actuated-coordinated, with a cycle length established at 180 seconds during both peak hours. Pedestrian walk phases are provided on Leestown Road on both sides of the road segment, each with a seven second duration. The Flash Don't Walk time is 12 seconds each for both the road segments.

The Northbound, S Forbes Road suffers from congestion and operates at an LOS E while the other road segments at the intersection works at an acceptable LOS B and D on Southbound, N Forbes Road and Leestown Road respectively as shown in Table A4.7.

Table A4.7: Existing Conditions – W Main Street/Leestown Road at S Forbes Road Approach Analysis

Approach	AM – Avg. Delay (sec/veh)	AM – LOS	PM – Avg. Delay (sec/veh)	PM – LOS
Northbound – S Forbes Road	59.9	E	64.9	E
Southbound – N Forbes Road	46.7	D	37.9	D
Eastbound – Leestown Road	13.4	B	18.7	B
Westbound – W Main Street	10.1	B	19.4	B



Intersection Models with Potential Improvement Concepts

In the potential improvement concepts (PICs) models, strategic modifications were implemented to improve traffic flow and safety at specific intersections, as compared to the base model which replicates the existing road network. At the intersection of South Limestone and Virginia Avenue/Huguelet Drive, the westbound right and through lanes were consolidated into a single lane. Additionally, this new combined lane was realigned to integrate with the adjacent segment on Virginia Avenue, enhancing the flow and safety at this junction. Similarly, at Versailles Road and Red Mile Road/South Forbes Road, a comparable approach was adopted. The westbound right and through lanes were merged into one lane. This combined lane was then aligned with the adjacent road segment on Red Mile Road, aiming to streamline traffic movement and reduce conflict points.



Appendix 5 – Innovative Intersections Analysis

Long-term potential improvement concepts utilize standard and innovative intersections to enhance safety and mobility. When paired with the short-term potential improvement concepts, these ensure bicyclists and pedestrians are safe and accommodated for. Below are the innovative intersection concepts recommended for consideration for each major intersection throughout the study area. These innovative intersections are shown as the best-case scenario for each intersection to provide a safer facility for all users. The Virginia Department of Transportation (VDOT) Junction Screening Tool (VJUST) was used to compare and evaluate the study intersections for the best possible intersection type. VJUST uses the following criteria:

- **Congestion:** The maximum volume/capacity (v/c) ratio represents the worst v/c of all zones that make up an intersection.
- **Pedestrian:** Compares the potential of each design to accommodate pedestrians based on safety, wayfinding, and delay. Potential is qualitatively defined as better (+), similar (blank cell), or worse (-) than a conventional intersection or traditional diamond interchange.
- **Safety:** Weighted Total = (2 x Crossing Conflicts) + Merging Conflicts + Diverging Conflicts.
- **Planning Level Costs:** Cost category estimates for each intersection/interchange alternative. Some alternatives have choices that affect the resulting cost category (e.g., requirement of a new bridge) that can be configured on the individual input worksheets.

Table A5.1 - Summary of Long-Term Potential Intersection Concepts

Intersection	Long Term Intersection Concepts
Virginia/Huguelet at Limestone	Bowtie Intersection
Virginia/Red Mile at Broadway	Median U-Turn (MUT)
Red Mile/Forbes at Versailles	Conventional Signal
Forbes at Old Frankfort Pike	Single Lane Roundabout
Forbes at Leestown/Main	Single Lane Roundabout with Mini-roundabout at Antique Drive

Virginia/Huguelet at Limestone

The Virginia/Huguelet at Limestone intersection has been studied throughout other studies, most recently the Imagine Nicholasville Road (INR) study that is now in the KYTC planning phase. The INR study suggests a bowtie roundabout be placed due to the potential for a center running bus rapid transit system that would eliminate the Limestone left turn lanes. If a center running bus rapid



transit system is not implemented, the short-term conventional signalized intersection would be the best option for the intersection. The bowtie roundabout intersection would utilize the parking garage entrance on Huguelet Drive and the Press Avenue intersection for the roundabouts, allowing vehicles wanting to turn left from Limestone to turn right and use the roundabout to make a U-turn and proceed as a through vehicle from side streets. Although this movement can seem tedious and inconvenient, the innovative intersection requires a reduction in phases and thus creates a more efficient and safer system. The bowtie is also a safer intersection improvement for bicyclists and pedestrians, as it has more time for crossing and less conflict points. Below is an example of a bowtie roundabout intersection.

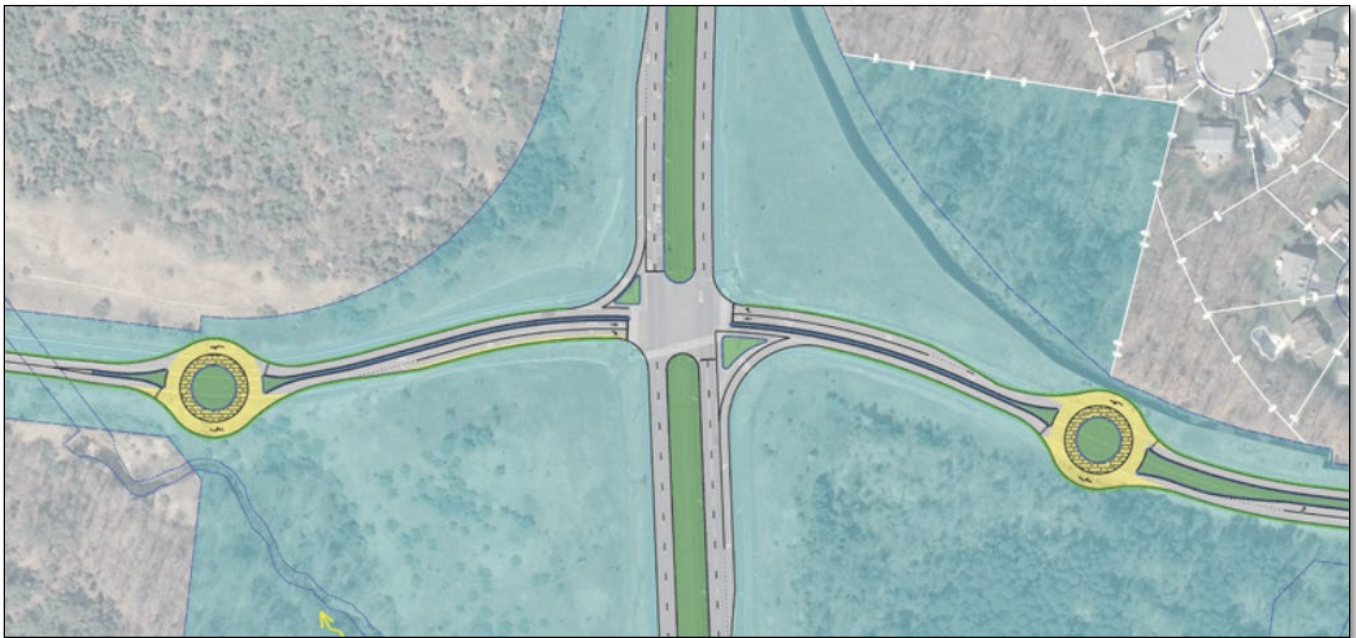


Figure A5.1 - Bowtie Intersection Example from FHWA

Virginia/Red Mile at Broadway

The Virginia/Red Mile at Broadway intersection has some recent improvements underway, but the potential long term innovative intersection improvement would be a Median U-Turn (MUT) Intersection. A Median U-Turn Intersection operates similarly to a Restricted Crossing U-Turn Intersection but with signals at the U-Turns. This intersection eliminates left turns from one major movement and allows vehicles to make a right turn, U-Turn, and then through movement to eliminate conflict points (16 conflict points instead of 32). Similarly to the bowtie roundabout intersection, this intersection would reduce travel time and crashes, while also improving bicycle and pedestrian safety. Due to right-of-way impacts, the U-Turn movements would be on the Virginia and Red Mile legs. Below is an example of a MUT.





Figure A5.2 - Median U-Turn Example from FHWA

Red Mile/Forbes at Versailles

The Red Mile/Forbes at Versailles intersection was recently improved. The improvements addressed safety needs, but with a potential trail, bicycle and pedestrian improvements are required. The short-term improvements would provide the necessary long-term improvements for this intersection and a conventional signalized intersection is recommended to stay.

Forbes at Old Frankfort Pike

The Forbes at Old Frankfort Pike intersection was recently improved with an added turn lane. The improvements addressed safety needs, but with a potential trail, bicycle and pedestrian improvements are required. The potential long-term intersection concept is to construct a single lane roundabout. Single lane roundabouts have numerous safety and mobility benefits by reducing conflict points and slowing vehicles down, but not always forcing a stopping situation. Right-of-way would need to be acquired to fit the roundabout in the space, but the benefits would be important for traffic calming in the area with more bicyclists and pedestrians due to the confluence of two trails. The *NCHRP 672: Roundabouts: An Informational Guide* recommends roundabouts based on traffic volumes for four-leg roundabouts. A single-lane roundabout can accommodate up to 20,000 AADT or 1,400-2,400 VPH. This intersection meets both criteria for traffic volumes. Figure A5.3 below highlights an example of a single lane roundabout.

Forbes at Leestown/Main

The Forbes at Leestown/Main intersection was recently studied by KYTC District 7. The potential long-term intersection concept is to construct a single lane roundabout. Single lane roundabouts have numerous safety and mobility benefits by reducing conflict points and slowing vehicles down, but not always forcing a stopping situation. Right-of-way would need to be acquired to fit the roundabout in the space, but the benefits would be important for traffic calming in the area with more bicyclists and pedestrians due to the confluence of two trails. The *NCHRP 672: Roundabouts: An Informational Guide* recommends roundabouts based on traffic volumes for four-leg roundabouts. A single-lane roundabout can accommodate up to 20,000 AADT or 1,400-2,400 VPH. This



intersection is close to the upper threshold, but still meets both criteria based on current traffic volumes. The below above highlights an example of a single lane roundabout.

A mini roundabout would benefit this area if included at the Antique Drive intersection to improve flow at both the main and secondary intersections. Due to the space of the parking lot, access management paired with these improvements would help the flow of the area and overall safety.



Figure A5.3 - Single Lane Roundabout Example, FHWA





CAMPUS TO COMMONS
TRAIL CONNECTIVITY STUDY